
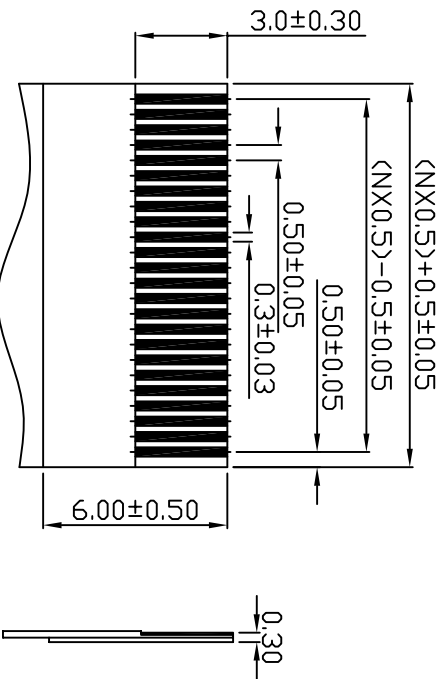
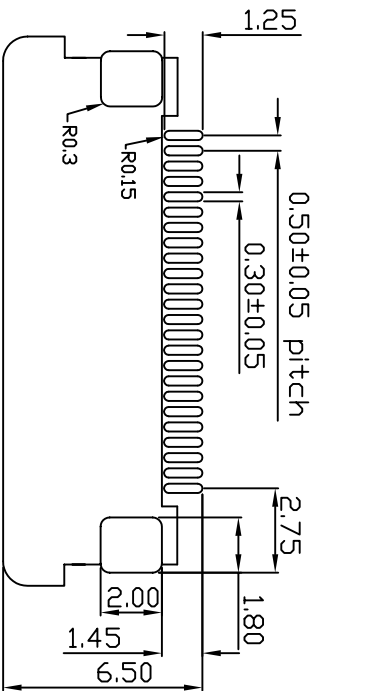




版 本	A	B	
	C	D	

NOTE:

- 1.MATERIAL:
HOUSING: NYLON UL 94V-0
CONTACT : BRASS
PLATING: TIN
TEMPERATURE:-20°C+85°C
2.SPECIFICATION:
SIZE:40 TO 60 CIRCUITS
VOLTAGE:50V
CURRENT:0.5A
CONTACT RESISTANCE:20mΩ MAX.
DIELECTRIC WITHSTANDING VOLTAGE:250V AC.

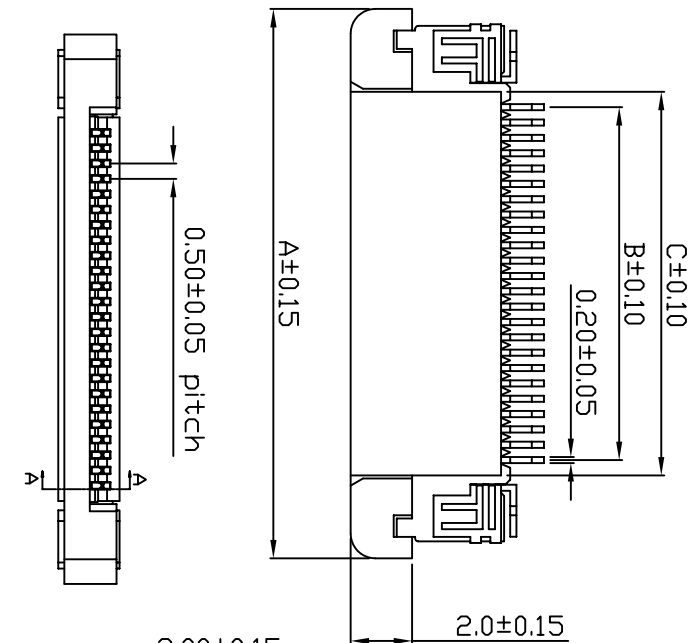

適用FFC/FPC
APPLICABLE FFC/FPC

CKT.	Catalog Number	A	B	C
40	FC201-40H	25.90	19.50	20.50
41	FC201-41H	26.40	20.00	21.00
42	FC201-42H	26.90	20.50	21.50
43	FC201-43H	27.40	21.00	22.00
44	FC201-44H	27.90	21.50	22.50
45	FC201-45H	28.40	22.00	23.00
46	FC201-46H	28.90	22.50	23.50
47	FC201-47H	29.40	23.00	24.00
48	FC201-48H	29.90	23.50	24.50
49	FC201-49H	30.40	24.00	25.00
50	FC201-50H	30.90	24.50	25.50
51	FC201-51H	31.40	25.00	26.00
52	FC201-52H	31.90	25.50	26.50
53	FC201-53H	32.40	26.00	27.00
54	FC201-54H	32.90	26.50	27.50
55	FC201-55H	33.40	27.00	28.00
56	FC201-56H	33.90	27.50	28.50
57	FC201-57H	34.40	28.00	29.00
58	FC201-58H	34.90	28.50	29.50
59	FC201-59H	35.40	29.00	30.00
60	FC201-60H	35.90	29.50	30.50

TOLERANCE (UNLESS SPECIFIED)			REV	A	DR. BY	胡三保	MATERIAL
LINEAR	ANGLE	SHEET					
X (±0.1)	X° (±1°)				CHK. BY		FINISH
XX (±0.05)	XX° (±0.1°)	SCALE		mm	APP. BY		DATE
XXX (±0.005)	XXX° (±0.01°)	UNIT					PART NO
							FC201-XXH

坤特股份有限公司

QUEENTECH ELECTRONIC CO., LTD

TITLE: P=0.5mm FFC/FPC CONNECTOR

DWG NO.