

版本	A		B
	C		D

NOTE:

1.MATERIAL:

HOUSING:NYLON UL 94V-0

CONTACT: PHOSPHOR BRONZE

PLATING: TIN

TEMPERATURE:-20°C+85°C

2.SPECIFICATION:







SIZE: 4 TO 50 CIRCUITS

VOLTAGE:50V MAX

CURRENT:0.4A MAX

CONTACT RESISTANCE: 20mΩ MAX.

DIELECTRIC WITHSTANDING VOLTAGE: 200V AC.

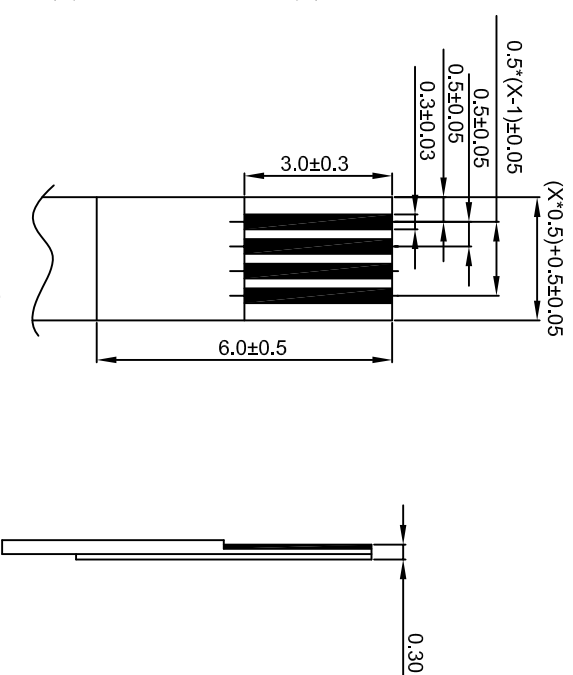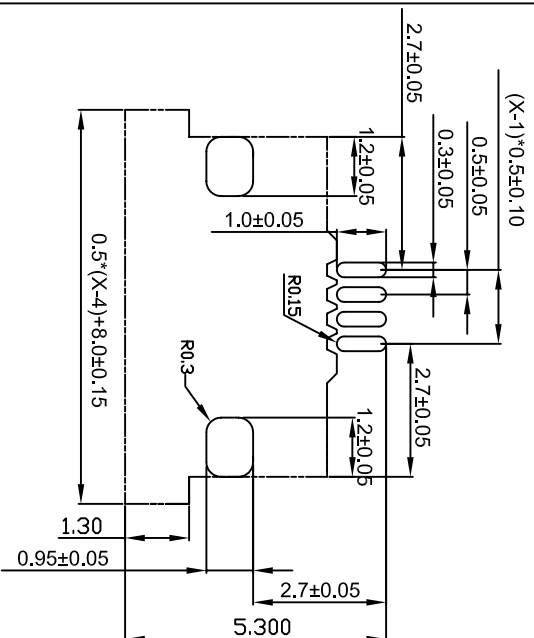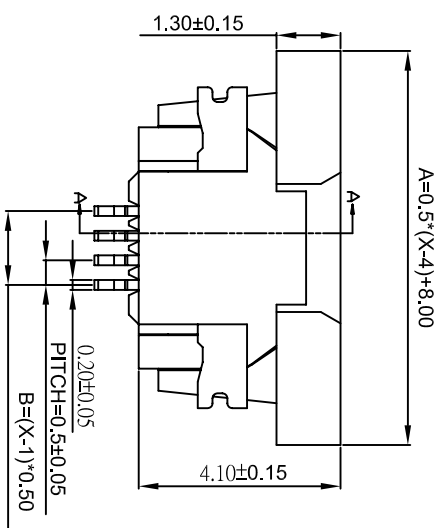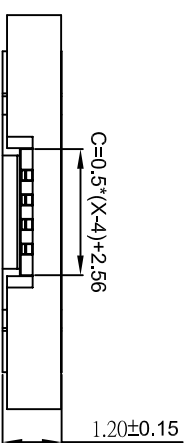

適用FFC/FPC

APPLICABLE FFC/FPC

PCB layout

KIT.	Catalog Number	A	B	C		Catalog Number	A	B	C
04	FC2010-04	8.00	1.50	2.56	27	FC2010-27	19.50	13.00	14.06
05	FC2010-05	8.50	2.00	3.06	28	FC2010-28	20.00	13.50	14.56
06	FC2010-06	9.00	2.50	3.56	29	FC2010-29	20.50	14.00	15.06
07	FC2010-07	9.50	3.00	4.06	30	FC2010-30	21.00	14.50	15.56
08	FC2010-08	10.00	3.50	4.56	31	FC2010-31	21.50	15.00	16.06
09	FC2010-09	10.50	4.00	5.06	32	FC2010-32	22.00	15.50	16.56
10	FC2010-10	11.00	4.50	5.56	33	FC2010-33	22.50	16.00	17.06
11	FC2010-11	11.50	5.00	6.06	34	FC2010-34	23.00	16.50	17.56
12	FC2010-12	12.00	5.50	6.56	35	FC2010-35	23.50	17.00	18.06
13	FC2010-13	12.50	6.00	7.06	36	FC2010-36	24.00	17.50	18.56
14	FC2010-14	13.00	6.50	7.56	37	FC2010-37	24.50	18.00	19.06
15	FC2010-15	13.50	7.00	8.06	38	FC2010-38	25.00	18.50	19.56
16	FC2010-16	14.00	7.50	8.56	39	FC2010-39	25.50	19.00	20.06
17	FC2010-17	14.50	8.00	9.06	40	FC2010-40	26.00	19.50	20.56
18	FC2010-18	15.00	8.50	9.56	41	FC2010-41	26.50	20.00	21.06
19	FC2010-19	15.50	9.00	10.06	42	FC2010-42	27.00	20.50	21.56
20	FC2010-20	16.00	9.50	10.56	43	FC2010-43	27.50	21.00	22.06
21	FC2010-21	16.50	10.00	11.06	44	FC2010-44	28.00	21.50	22.56
22	FC2010-22	17.00	10.50	11.56	45	FC2010-45	28.50	22.00	23.06
23	FC2010-23	17.50	11.00	12.06	46	FC2010-46	29.00	22.50	23.56
24	FC2010-24	18.00	11.50	12.56	47	FC2010-47	29.50	23.00	24.06
25	FC2010-25	18.50	12.00	13.06	48	FC2010-48	30.00	23.50	24.56
26	FC2010-26	19.00	12.50	13.56	49	FC2010-49	30.50	24.00	25.06
					50	FC2010-50	31.00	24.50	25.56

[illegible]