
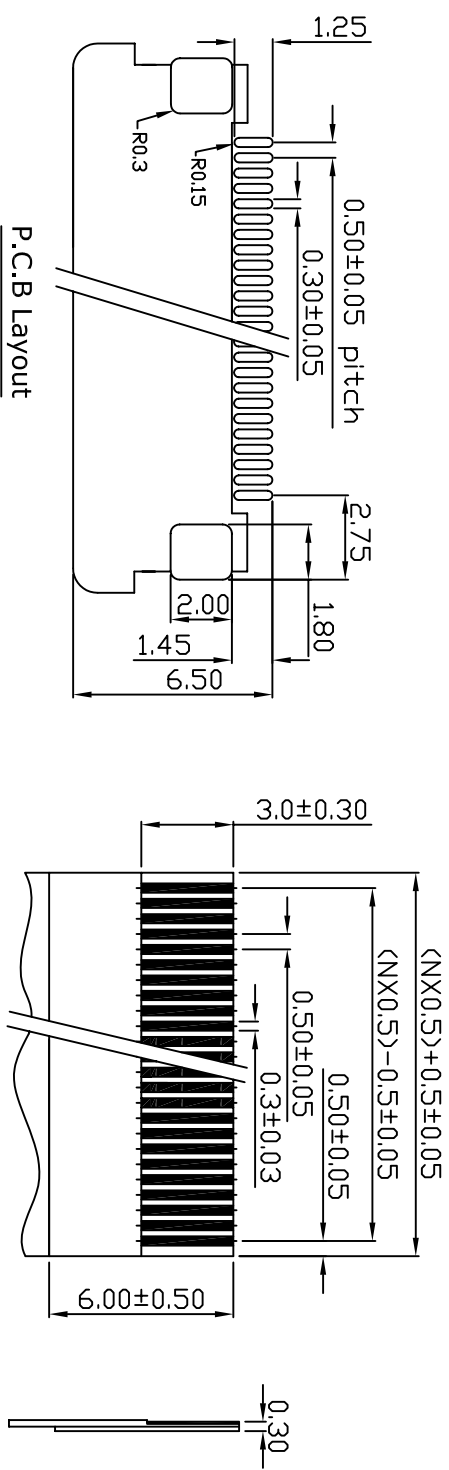


版 本	A	B
	C	D

NOTE:

1. MATERIAL:
HOUSING: NYLON UL 94V-0
CONTACT : BRASS
PLATING: TIN
TEMPERATURE: -20°C+85°C
2. SPECIFICATION:
SIZE: 40 TO 60 CIRCUITS
VOLTAGE: 50V
CURRENT: 0.5A
CONTACT RESISTANCE: 20mΩ MAX.
DIELECTRIC WITHSTANDING VOLTAGE: 250V AC.

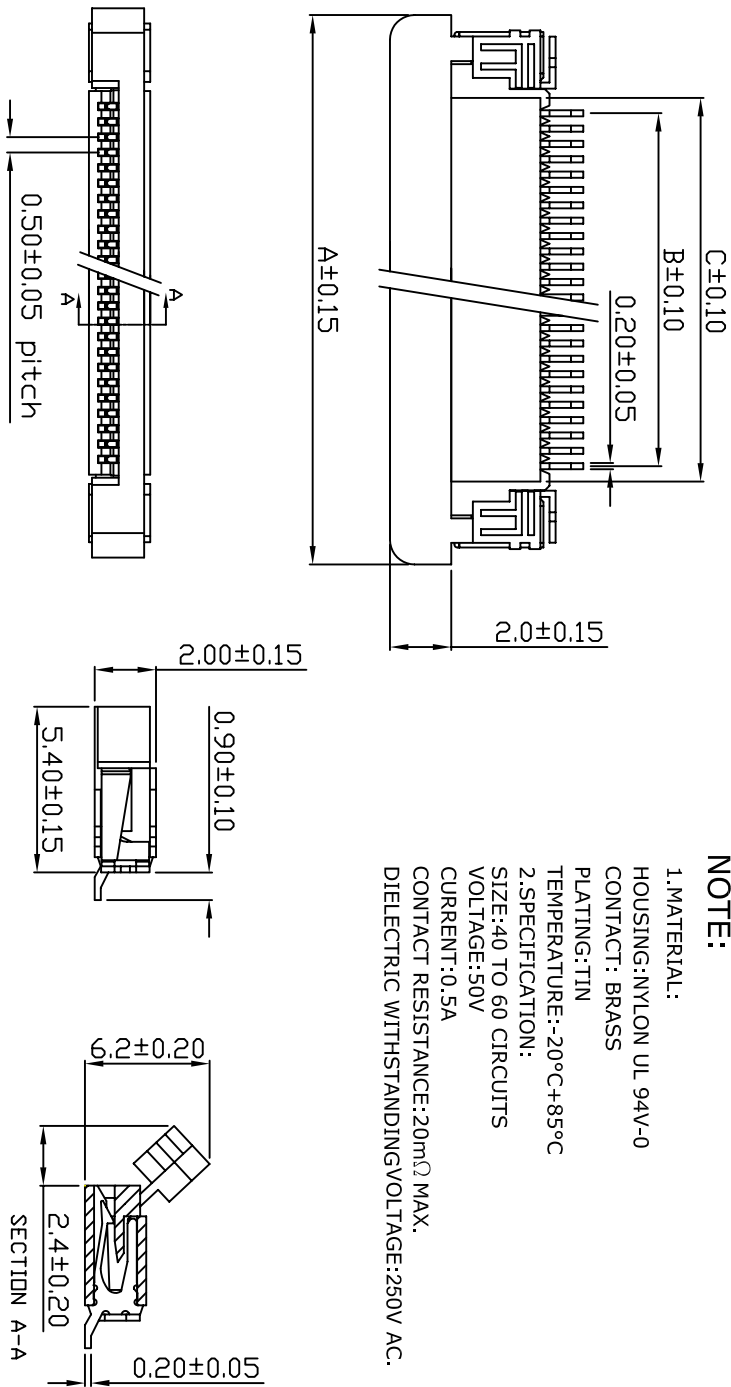

P.C.B Layout

適用FFC/FPC
APPLICABLE FFC/FPC

TOLERANCE (UNLESS SPECIFIED)		REV	A	DR. BY	胡三保	MATERIAL
LINEAR	ANGLE	SHEET		CHK. BY		FINISH
X (± 0.1)	X° ($\pm 1^\circ$)					
XX (± 0.05)	XX° ($\pm 0.1^\circ$)	SCALE	1:1	APP. BY		DATE
XXX (± 0.03)	XXX° ($\pm 0.01^\circ$)	UNIT	mm			PART NO
						FC202-XXH

DIMENSIONS(mm)

CKT.	Catalog Number	A	B	C
40	FC202-40H	25.90	19.50	20.50
41	FC202-41H	26.40	20.00	21.00
42	FC202-42H	26.90	20.50	21.50
43	FC202-43H	27.40	21.00	22.00
44	FC202-44H	27.90	21.50	22.50
45	FC202-45H	28.40	22.00	23.00
46	FC202-46H	28.90	22.50	23.50
47	FC202-47H	29.40	23.00	24.00
48	FC202-48H	29.90	23.50	24.50
49	FC202-49H	30.40	24.00	25.00
50	FC202-50H	30.90	24.50	25.50
51	FC202-51H	31.40	25.00	26.00
52	FC202-52H	31.90	25.50	26.50
53	FC202-53H	32.40	26.00	27.00
54	FC202-54H	32.90	26.50	27.50
55	FC202-55H	33.40	27.00	28.00
56	FC202-56H	33.90	27.50	28.50
57	FC202-57H	34.40	28.00	29.00
58	FC202-58H	34.90	28.50	29.50
59	FC202-59H	35.40	29.00	30.00
60	FC202-60H	35.90	29.50	30.50



坤特股份有限公司
QUEENTECH ELECTRONIC CO., LTD



TITLE: P±0.5mm FFC/FPC CONNECTOR
DWG NO.