

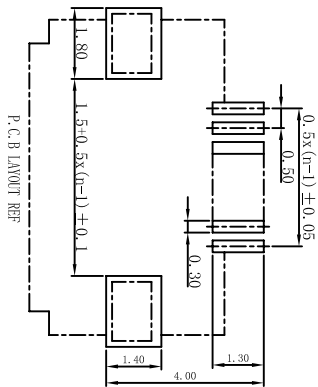
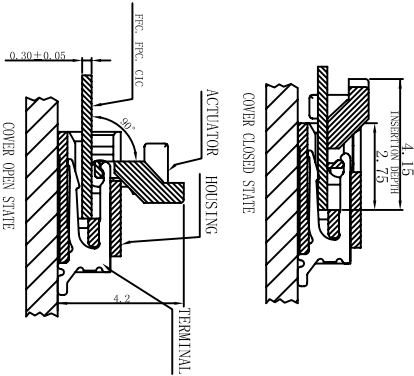
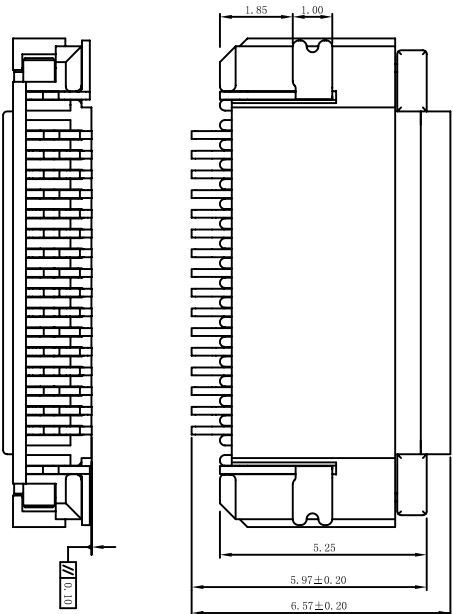


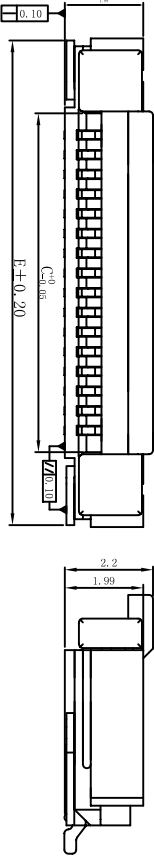

技術參數 SPECIFICATIONS

- ◆ 極數: 4*60 Poles
- ◆ 額定電壓: AC, DC, 200V(50/60Hz有效值)
- ◆ Voltage rating: AC, DC, 50V(200/112)
- ◆ 額定電流: 0.4A, AC, DC
- ◆ Current rating: 0.4A, AC, DC
- ◆ 耐壓值: 200V AC/minute
- ◆ Withstand voltage: 200V AC/minute
- ◆ 工作溫度: -25 C*~85 C
- ◆ Working Temperature: -25 C*~85 C
- ◆ 絕緣電阻: ≥ 500 Ω
- ◆ Insulation resistance: ≥ 500 Ω
- ◆ 接觸電阻: ≤ 0.02 Ω
- ◆ Contact resistance: ≤ 0.02 Ω
- ◆ 單面接觸: Single Contact
- ◆ 接觸件 (TERMINAL) Material: 磷青銅
- ◆ 材料: Phosphor Bronze
- ◆ 塑膠本體 (HOUSING) Material: PBT, UL 94V-0
- ◆ 材料: LCP, UL94-0
- ◆ 包裝方式 PACKAGE
- ◆ 帶裝 Pipe Package

NO. of Connectors (60)	Dimensions				
	A	B	C	D	E
4	6.4	5.80	2.60	1.50	6.3
5	6.9	6.30	3.10	2.00	6.8
6	7.4	6.80	3.60	2.50	7.3
7	7.9	7.30	4.10	3.00	7.8
8	8.4	7.80	4.60	3.50	8.3
9	8.9	8.30	5.10	4.00	8.8
10	9.4	8.80	5.60	4.50	9.3
11	9.9	9.30	6.10	5.00	9.8
12	10.4	9.80	6.60	5.50	10.3
13	10.9	10.30	7.10	6.00	10.8
14	11.4	10.80	7.60	6.50	11.3
15	11.9	11.30	8.10	7.00	11.8
16	12.4	11.80	8.60	7.50	12.3
17	12.9	12.30	9.10	8.00	12.8
18	13.4	12.80	9.60	8.50	13.3
19	13.9	13.30	10.10	9.00	13.8
20	14.4	13.80	10.60	9.50	14.3
21	14.9	14.30	11.10	10.00	14.8
22	15.4	14.80	11.60	10.50	15.3
23	15.9	15.30	12.10	11.00	15.8
24	16.4	15.80	12.60	11.50	16.3
25	16.9	16.30	13.10	12.00	16.8
26	17.4	16.80	13.60	12.50	17.3
27	17.9	17.30	14.10	13.00	17.8
28	18.4	17.80	14.60	13.50	18.3
29	18.9	18.30	15.10	14.00	18.8
30	19.4	18.80	15.60	14.50	19.3
31	19.9	19.30	16.10	15.00	19.8
32	20.4	19.80	16.60	15.50	20.3
33	20.9	20.30	17.10	16.00	20.8
34	21.4	20.80	17.60	16.50	21.3
35	21.9	21.30	18.10	17.00	21.8
36	22.4	21.80	18.60	17.50	22.3
37	22.9	22.30	19.10	18.00	22.8
38	23.4	22.80	19.60	18.50	23.3
39	23.9	23.30	20.10	19.00	23.8
40	24.4	23.80	20.60	19.50	24.3
41	24.9	24.30	21.10	20.00	24.8
42	25.4	24.80	21.60	20.50	25.3
43	25.9	25.30	22.10	21.00	25.8
44	26.4	25.80	22.60	21.50	26.3
45	26.9	26.30	23.10	22.00	26.8
46	27.4	26.80	23.60	22.50	27.3
47	27.9	27.30	24.10	23.00	27.8
48	28.4	27.80	24.60	23.50	28.3
49	28.9	28.30	25.10	24.00	28.8
50	29.4	28.80	25.60	24.50	29.3
51	29.9	29.30	26.10	25.00	29.80
52	30.4	29.80	26.60	25.50	30.30
53	30.9	30.30	27.10	26.00	30.80
54	31.4	30.80	27.60	26.50	31.30
55	31.9	31.30	28.10	27.00	31.80
56	32.4	31.80	28.60	27.50	32.30
57	32.9	32.30	29.10	28.00	32.80
58	33.4	32.80	29.60	28.50	33.30
59	33.9	33.30	30.10	29.00	33.80
60	34.4	33.80	30.60	29.50	34.30

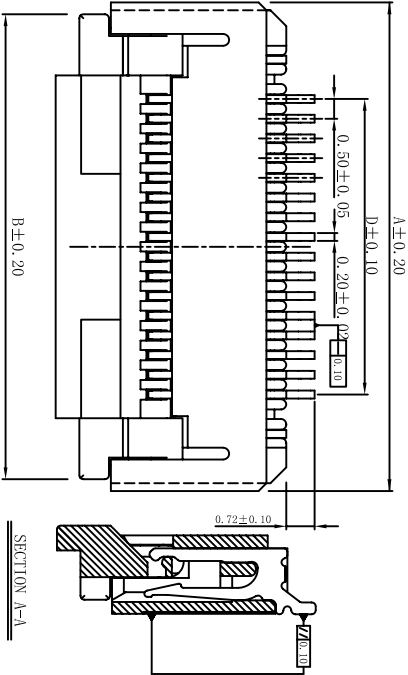

坤特電子(深圳)有限公司
QUINTENTECH ELECTRONIC CO., LTD

MATERIAL:

FINISH:

.XXX ±0.10
.XX ±0.20
.X ±0.30

±1°

L INEAR ANGLE

DRAWING BY: 鄭陽生

CHECKED BY:

APPROVED BY:

SCALE :


REV:

PART NO : FC206-XXI

CUST NO : / DWG NO:1

TITLE: P=0.5mm FFC/PC CONNECTOR 掀蓋式

THIRD ANGLE PROJECTION



L7R

REVISION RECORD

DRG

CHK

DATE

A

RELEASE

鄭陽生

2007-11-23