

版 本	A	B
	C	D

NOTE:

1.MATERIAL:

HOUSING: NYLON UL 94V-0

CONTACT: BRASS

PLATING: TIN

TEMPERATURE: -20°C +85°C

2.SPECIFICATION:




SIZE: 2 TO 29 CIRCUITS

VOLTAGE: 50V


CURRENT: 1.0A

CONTACT RESISTANCE: 20mΩ MAX.

DIELECTRIC WITHSTANDING VOLTAGE: 500V AC.

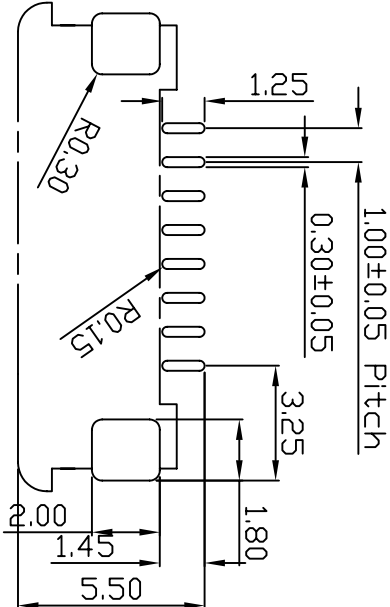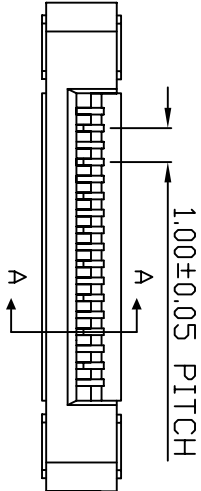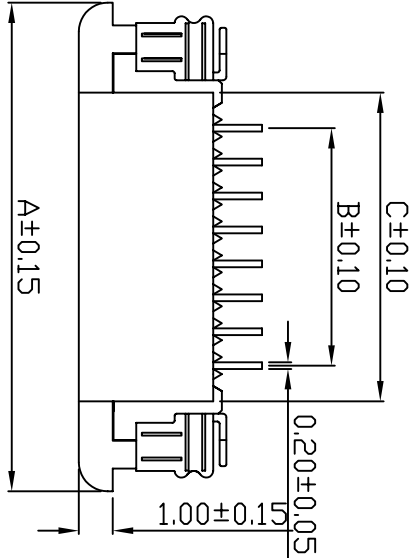

PCB layout

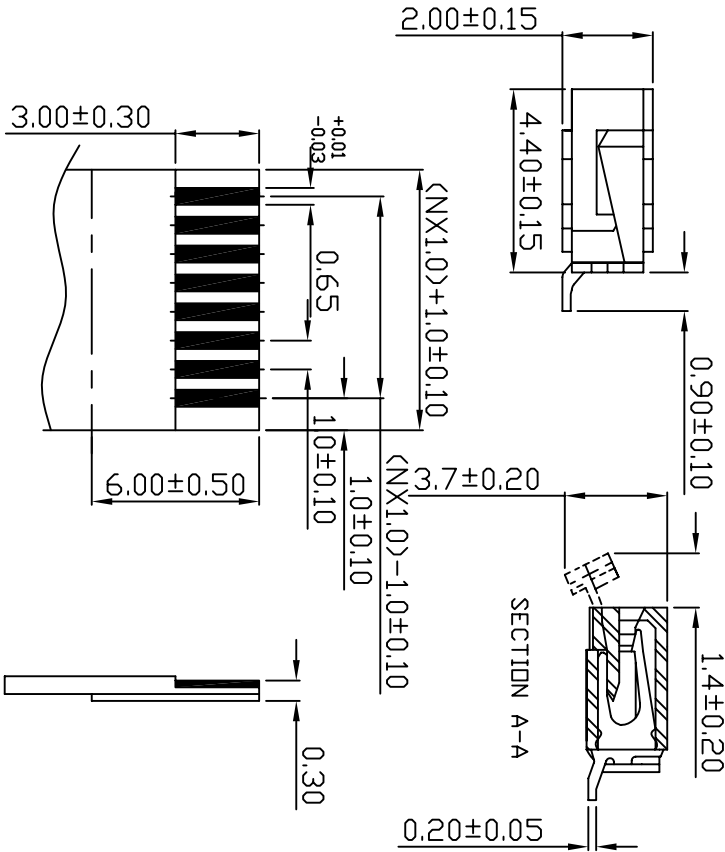

適用FFC/FPC

APPLICABLE FFC/FPC

TOLERANCE UNLESS SPECIFIED		REV	A	DR. BY	胡三保	MATERIAL
LINEAR	ANGLE	SHEET		CHK. BY		FINISH
X (±0.1)	X° (±1°)	SCALE	1:1			DATE
XX (±0.05)	X° (±0.1°)	UNIT	mm	APP. BY		PART NO
XXX (±0.03)	XX° (±0.01°)					FC501-XX

DIMENSIONS(mm)

CKT.	Catalog Number	A	B	C
02	FC501-02	8.40	1.00	3.00
03	FC501-03	9.40	2.00	4.00
04	FC501-04	10.40	3.00	5.00
05	FC501-05	11.40	4.00	6.00
06	FC501-06	12.40	5.00	7.00
07	FC501-07	13.40	6.00	8.00
08	FC501-08	14.40	7.00	9.00
09	FC501-09	15.40	8.00	10.00
10	FC501-10	16.40	9.00	11.00
11	FC501-11	17.40	10.00	12.00
12	FC501-12	18.40	11.00	13.00
13	FC501-13	19.40	12.00	14.00
14	FC501-14	20.40	13.00	15.00
15	FC501-15	21.40	14.00	16.00
16	FC501-16	22.40	15.00	17.00
17	FC501-17	23.40	16.00	18.00
18	FC501-18	24.40	17.00	19.00
19	FC501-19	25.40	18.00	20.00
20	FC501-20	26.40	19.00	21.00
21	FC501-21	27.40	20.00	22.00
22	FC501-22	28.40	21.00	23.00
23	FC501-23	29.40	22.00	24.00
24	FC501-24	30.40	23.00	25.00
25	FC501-25	31.40	24.00	26.00
26	FC501-26	32.40	25.00	27.00
27	FC501-27	33.40	26.00	28.00
28	FC501-28	34.40	27.00	29.00
29	FC501-29	35.40	28.00	30.00

坤特股份有限公司

QUEENTECH ELECTRONIC CO., LTD

TITLE: P=1.00MM FFC/FPC CONNECTOR

DWG NO.