
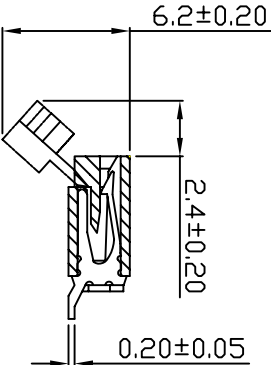

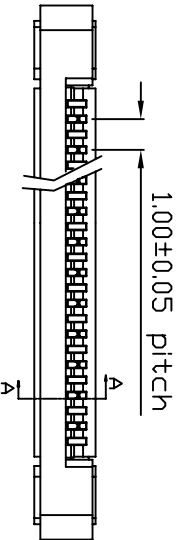



版 本	A	B
	C	D

NOTE:


- 1.MATERIAL:
HOUSING:NYLON UL 94V-0
CONTACT: BRASS
PLATING:TIN
TEMPERATURE:-20°C+85°C
- 2.SPECIFICATION:
SIZE:20 TO 29 CIRCUITS
VOLTAGE:50V
CURRENT:1.0A
CONTACT RESISTANCE:20mΩ MAX.
DIELECTRIC WITHSTANDING VOLTAGE:500V AC.

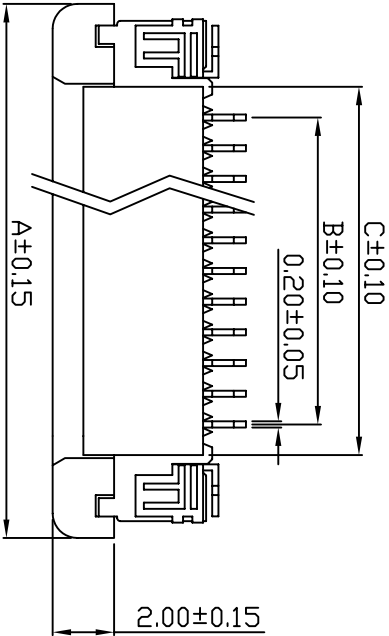

SECTION A-A

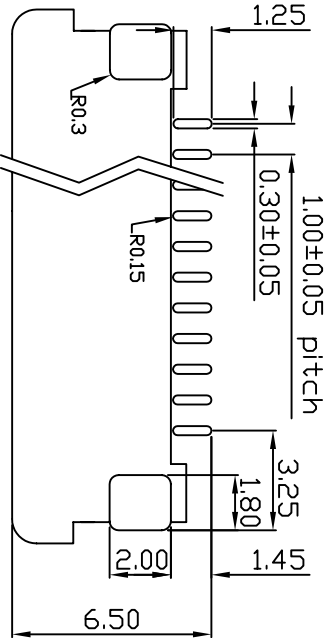

P.C.B Layout

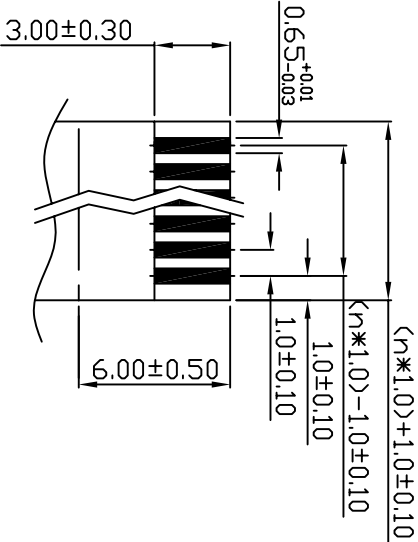

適用FFC/FPC
APPLICABLE FFC/FPC

TOLERANCE (UNLESS SPECIFIED)		REV	A	DR. BY	胡三保	MATERIAL
LINEAR	ANGLE	SHEET		CHK. BY		FINISH
X (+0.1)	X° (+1°)					
XX (+0.05)	X° (+0.1°)	SCALE		APP. BY		DATE
XXX (+0.005)	XX° (+0.01°)	UNIT	mm			2008-07-14
						PART NO
						FC501-XXH

DIMENSIONS(mm)

CKT.	Catalog Number	A	B	C
20	FC501-20H	26.40	19.00	21.00
21	FC501-21H	27.40	20.00	22.00
22	FC501-22H	28.40	21.00	23.00
23	FC501-23H	29.40	22.00	24.00
24	FC501-24H	30.40	23.00	25.00
25	FC501-25H	31.40	24.00	26.00
26	FC501-26H	32.40	25.00	27.00
27	FC501-27H	33.40	26.00	28.00
28	FC501-28H	34.40	27.00	29.00
29	FC501-29H	35.40	28.00	30.00

坤特股份有限公司
QUEENTECH ELECTRONIC CO.,LTD

TITLE: P=1.0mm FFC/FPC CONNECTOR

DWG NO.