

版 本	A	B
	C	D

NOTE:

1.MATERIAL:

HOUSING:NYLON UL 94V-0

CONTACT:PHOSPHOR BRONZE

PLATING:TIN

TEMPERATURE:-20°C+85°C

2.SPECIFICATION:







SIZE:2 TO 24 CIRCUITS

VOLTAGE:50V MAX

CURRENT:0.5A MAX

CONTACT RESISTANCE:20mΩ MAX.

DIELECTRIC WITHSTANDING VOLTAGE:500V AC.

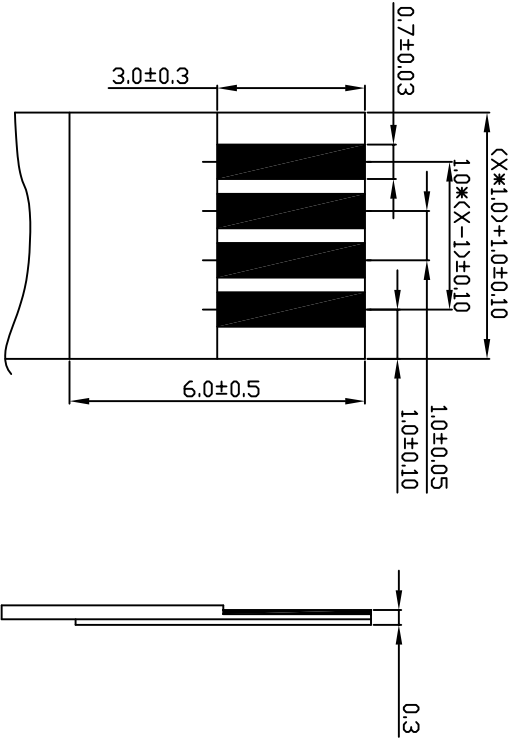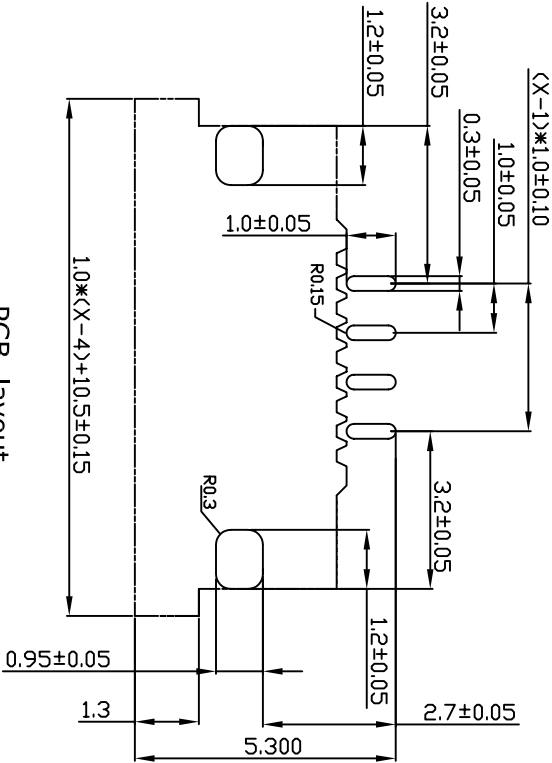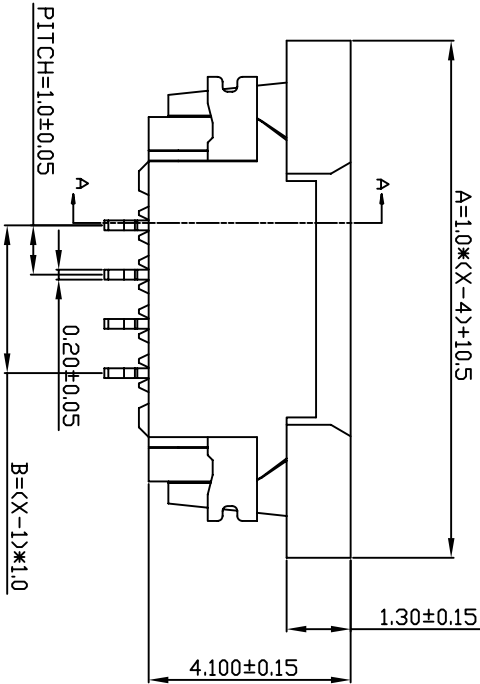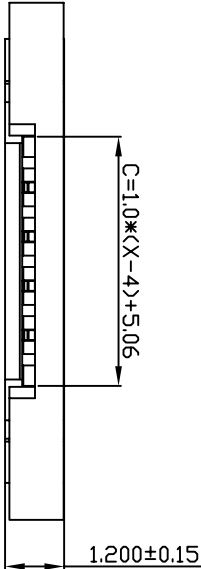

適用FFC/FPC
APPLICABLE FFC/FPC

DIMENSIONS(mm)			
CKT.	Catalog Number	A	B C
02	FC5010-02	8.50	2.00 3.06
03	FC5010-03	9.50	3.00 4.06
04	FC5010-04	10.50	4.00 5.06
05	FC5010-05	11.50	5.00 6.06
06	FC5010-06	12.50	6.00 7.06
07	FC5010-07	13.50	7.00 8.06
08	FC5010-08	14.50	8.00 9.06
09	FC5010-09	15.50	9.00 10.06
10	FC5010-10	16.50	10.00 11.06
11	FC5010-11	17.50	11.00 12.06
12	FC5010-12	18.50	12.00 13.06
13	FC5010-13	19.50	13.00 14.06
14	FC5010-14	20.50	14.00 15.06
15	FC5010-15	21.50	15.00 16.06
16	FC5010-16	22.50	16.00 17.06
17	FC5010-17	23.50	17.00 18.06
18	FC5010-18	24.50	18.00 19.06
19	FC5010-19	25.50	19.00 20.06
20	FC5010-20	26.50	20.00 21.06
21	FC5010-21	27.50	21.00 22.06
22	FC5010-22	28.50	22.00 23.06
23	FC5010-23	29.50	23.00 24.06
24	FC5010-24	30.50	24.00 25.06

PCB layout

TOLERANCE (UNLESS SPECIFIED)			REV	A	DR. BY	胡三保	MATERIAL
LINEAR	ANGLE	SHEET					
X (±0.1)	X° (±1°)				CHK. BY		FINISH
XX (±0.05)	X° (±0.1°)	SCALE		1:1	APP. BY		DATE
XXX (±0.005)	XX° (±0.01°)	UNIT		mm			PART NO
							FC5010-XX

Q T QUEENTECH ELECTRONIC CO., LTD

坤特股份有限公司

TITLE:P=1.0mm FFC/FPC CONNECTOR

DWG. NO.