
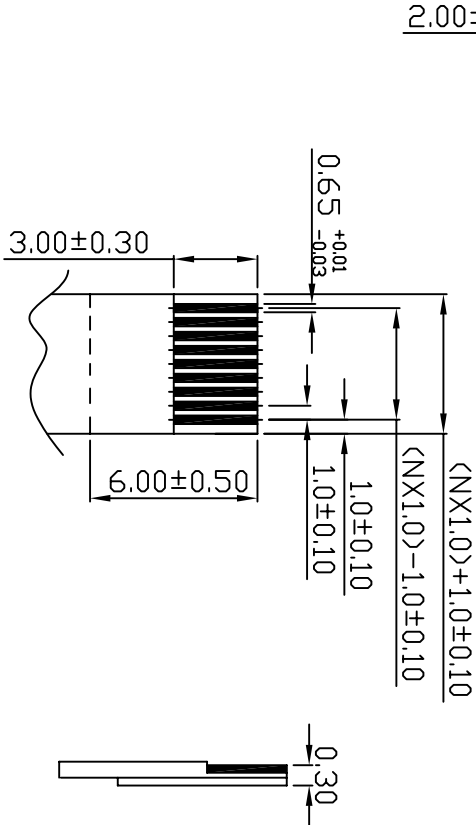
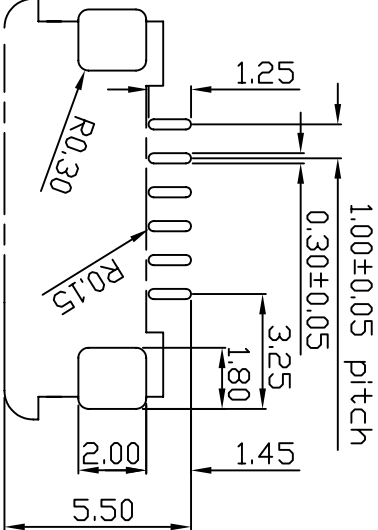
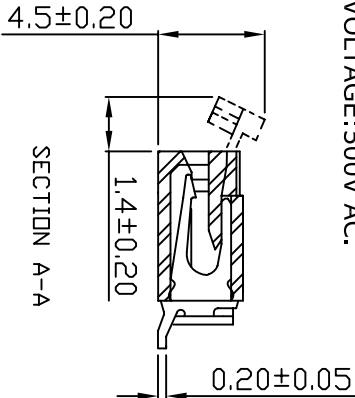

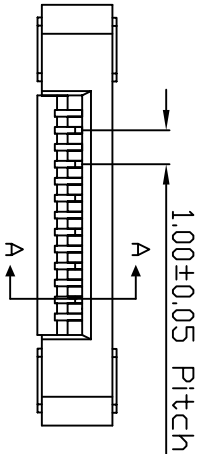


版 本	A	B	
	C	D	

NOTE:

- 1.MATERIAL:
HOUSING: NYLON UL 94V-0
CONTACT: BRASS
PLATING: TIN
- TEMPERATURE: -20°C+85°C
- 2.SPECIFICATION:
SIZE: 2 TO 29 CIRCUITS
VOLTAGE: 50V
CURRENT: 1.0A
- CONTACT RESISTANCE: 20mΩMAX.
- DIELECTRIC WITHSTANDING VOLTAGE: 500V AC.

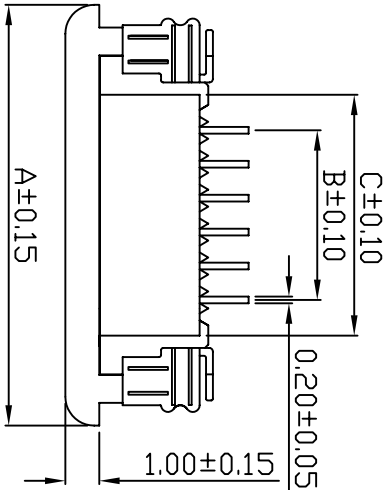

DIMENSIONS(mm)			
CKT.	Catalog Number	A	B C
02	FC502-02W	8.40	1.00 3.00
03	FC502-03W	9.40	2.00 4.00
04	FC502-04W	10.40	3.00 5.00
05	FC502-05W	11.40	4.00 6.00
06	FC502-06W	12.40	5.00 7.00
07	FC502-07W	13.40	6.00 8.00
08	FC502-08W	14.40	7.00 9.00
09	FC502-09W	15.40	8.00 10.00
10	FC502-10W	16.40	9.00 11.00
11	FC502-11W	17.40	10.00 12.00
12	FC502-12W	18.40	11.00 13.00
13	FC502-13W	19.40	12.00 14.00
14	FC502-14W	20.40	13.00 15.00
15	FC502-15W	21.40	14.00 16.00
16	FC502-16W	22.40	15.00 17.00
17	FC502-17W	23.40	16.00 18.00
18	FC502-18W	24.40	17.00 19.00
19	FC502-19W	25.40	18.00 20.00
20	FC502-20W	26.40	19.00 21.00
21	FC502-21W	27.40	20.00 22.00
22	FC502-22W	28.40	21.00 23.00
23	FC502-23W	29.40	22.00 24.00
24	FC502-24W	30.40	23.00 25.00
25	FC502-25W	31.40	24.00 26.00
26	FC502-26W	32.40	25.00 27.00
27	FC502-27W	33.40	26.00 28.00
28	FC502-28W	34.40	27.00 29.00
29	FC502-29W	35.40	28.00 30.00

PCB layout

適用FFC/FPC
APPLICABLE FFC/FPC

TOLERANCE (UNLESS SPECIFIED)		REV	A	DR. BY	MATERIAL	
LINEAR	ANGLE	SHEET			FINISH	
X (±0.1)	X° (±1°)			CHK. BY	DATE	
XX (±0.05)	XX° (±0.1°)	SCALE	1:1	APP. BY	PART NO	
XXX (±0.03)	XXX° (±0.01°)	UNIT	mm		FC502-XX	

坤特股份有限公司

QUEENTECH ELECTRONIC CO.,LTD

TITLE: P=1.00mm FFC/FPC CONNECTOR

DWG. NO.