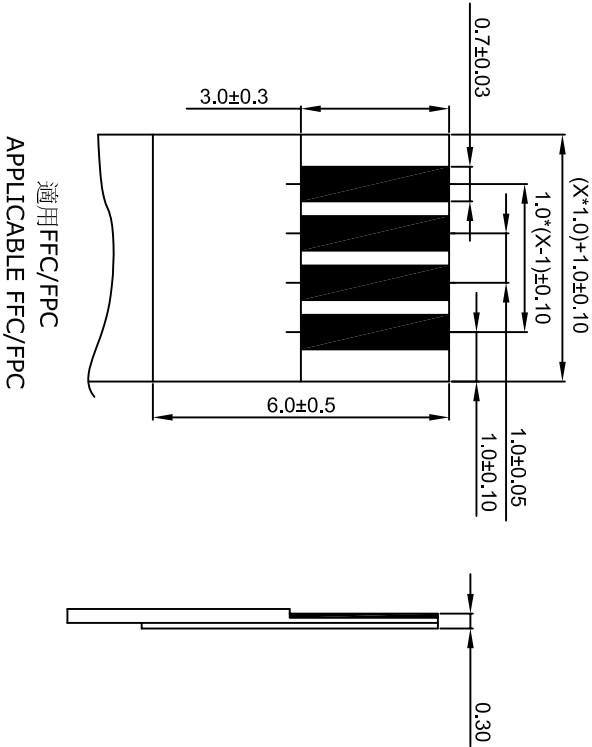

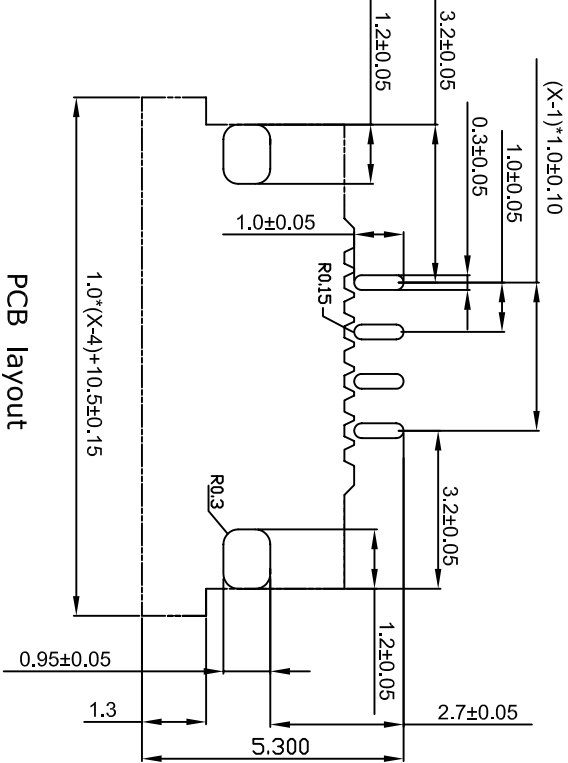
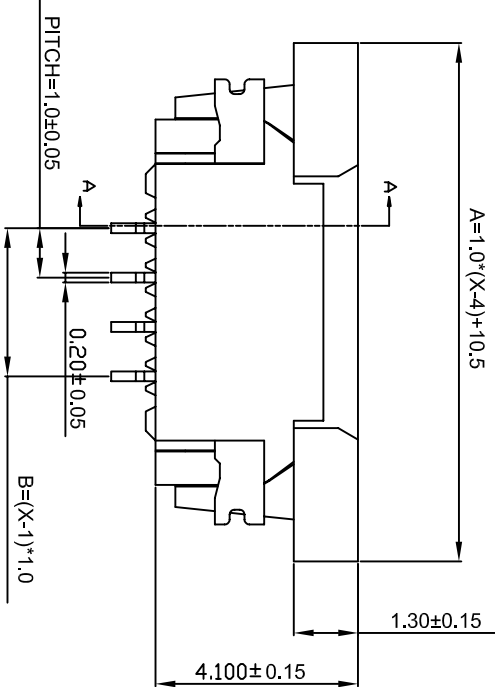
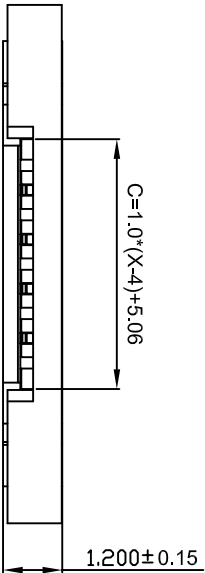


NOTE:
1.MATERIAL:
HOUSING:NYLON UL 94V-0
CONTACT:PHOSPHOR BRONZE
PLATING:TIN
TEMPERATURE:-20°C+85°C
2.SPECIFICATION:
SIZE:2 TO 24 CIRCUITS
VOLTAGE:50V MAX
CURRENT:0.5A MAX
CONTACT RESISTANCE:20mΩ MAX.
DIELECTRIC WITHSTANDING VOLTAGE:500V AC.

DIMENSIONS(mm)

Ckt. Number	A	B	C
02 FC5020-02	8.50	2.00	3.06
03 FC5020-03	9.50	3.00	4.06
04 FC5020-04	10.50	4.00	5.06
05 FC5020-05	11.50	5.00	6.06
06 FC5020-06	12.50	6.00	7.06
07 FC5020-07	13.50	7.00	8.06
08 FC5020-08	14.50	8.00	9.06
09 FC5020-09	15.50	9.00	10.06
10 FC5020-10	16.50	10.00	11.06
11 FC5020-11	17.50	11.00	12.06
12 FC5020-12	18.50	12.00	13.06
13 FC5020-13	19.50	13.00	14.06
14 FC5020-14	20.50	14.00	15.06
15 FC5020-15	21.50	15.00	16.06
16 FC5020-16	22.50	16.00	17.06
17 FC5020-17	23.50	17.00	18.06
18 FC5020-18	24.50	18.00	19.06
19 FC5020-19	25.50	19.00	20.06
20 FC5020-20	26.50	20.00	21.06
21 FC5020-21	27.50	21.00	22.06
22 FC5020-22	28.50	22.00	23.06
23 FC5020-23	29.50	23.00	24.06
24 FC5020-24	30.50	24.00	25.06

適用FFC/FPC
APPLICABLE FFC/FPC

TOLERANCE (UNLESS SPECIFIED)		REV	A	DR. BY	MATERIAL
LINEAR	ANGLE	SHEET		胡三保	
X (±0.1)	X° (±1°)			CHK. BY	FINISH
XX (±0.05)	X° (±0.1°)	SCALE	1:1	APP. BY	DATE
XXX (±0.005)	XX° (±0.01°)	UNIT	mm		PART NO
					FC5020-XX

Q T QUEENTECH ELECTRONIC CO., LTD

坤特股份有限公司

TITLE:P=1.0mm FFC/FPC CONNECTOR

DWG. NO.

版	A	B
本	C	D