
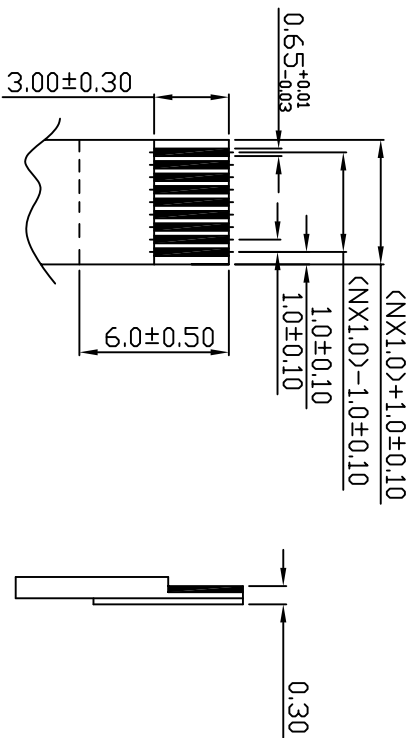
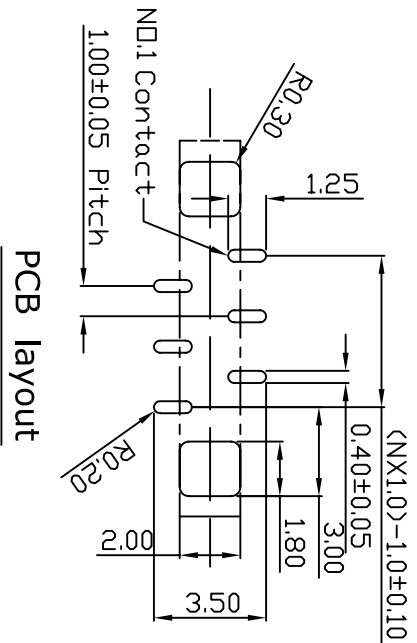
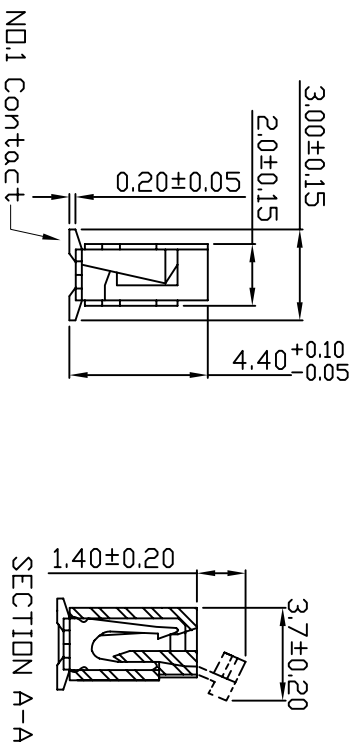
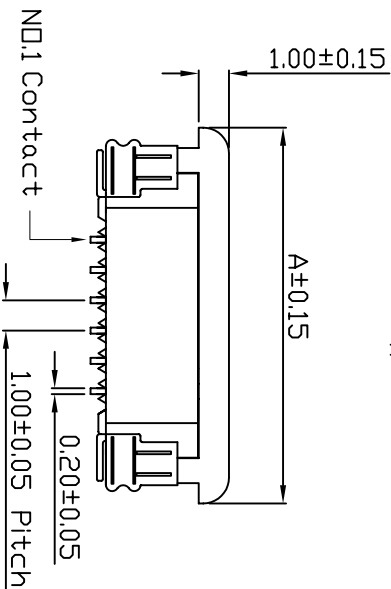


版本	A	B	
	C	D	

NOTE:

- 1.MATERIAL:
HOUSING:NYLON UL 94V-0
CONTACT: BRASS
PLATING:TIN
TEMPERATURE:-20 ° C TO+85° C
2.SPECIFICATION:
SIZE:2 TO 29 CIRCUITS
VOLTAGE:50V
CURRENT:1.0A
CONTACT RESISTANCE:20mΩ MAX.
DIELECTRIC WITHSTANDING VOLTAGE:500V AC.

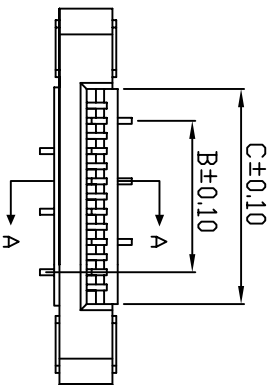

適用FFC/FPC
APPLICABLE FFC/FPC

CKT.	Catalog Number	A	B	C
02	FC503-02	8.40	1.00	3.00
03	FC503-03	9.40	2.00	4.00
04	FC503-04	10.40	3.00	5.00
05	FC503-05	11.40	4.00	6.00
06	FC503-06	12.40	5.00	7.00
07	FC503-07	13.40	6.00	8.00
08	FC503-08	14.40	7.00	9.00
09	FC503-09	15.40	8.00	10.00
10	FC503-10	16.40	9.00	11.00
11	FC503-11	17.40	10.00	12.00
12	FC503-12	18.40	11.00	13.00
13	FC503-13	19.40	12.00	14.00
14	FC503-14	20.40	13.00	15.00
15	FC503-15	21.40	14.00	16.00
16	FC503-16	22.40	15.00	17.00
17	FC503-17	23.40	16.00	18.00
18	FC503-18	24.40	17.00	19.00
19	FC503-19	25.40	18.00	20.00
20	FC503-20	26.40	19.00	21.00
21	FC503-21	27.40	20.00	22.00
22	FC503-22	28.40	21.00	23.00
23	FC503-23	29.40	22.00	24.00
24	FC503-24	30.40	23.00	25.00
25	FC503-25	31.40	24.00	26.00
26	FC503-26	32.40	25.00	27.00
27	FC503-27	33.40	26.00	28.00
28	FC503-28	34.40	27.00	29.00
29	FC503-29	35.40	28.00	30.00

TOLERANCE (UNLESS SPECIFIED)			REV		A		DR. BY		MATERIAL	
LINEAR			ANGLE		SHEET		CHK. BY		FINISH	
X (±0.1)			X° (±1°)							
XX (±0.05)			X° (±0.1°)		SCALE				DATE	
XXX (±0.03)			XX° (±0.01°)		UNIT		APP. BY		PART NO	
					mm				FC503-XX	

坤特股份有限公司

QUEENTECH ELECTRONIC CO.,LTD

TITLE: 1.00 PITCH FFC/FPC CONNECTOR

DWG NO.