
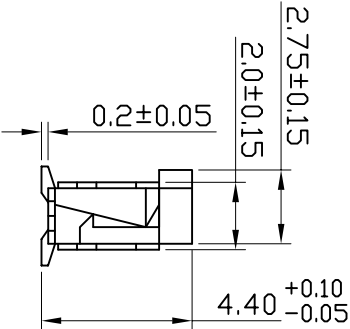
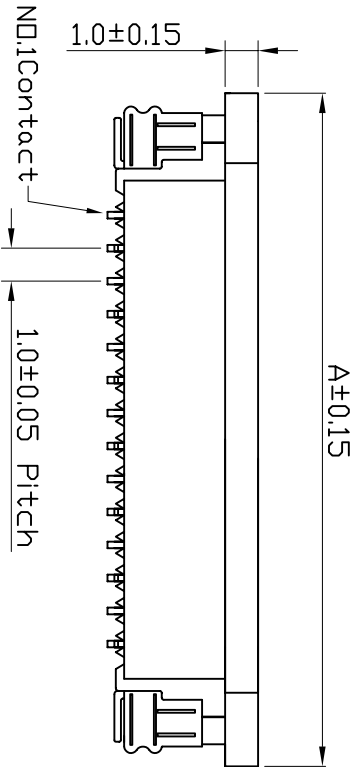





版 本	A	B	
	C	D	

NOTE:

- 1.MATERIAL:
HOUSING:NYLON UL 94V-0
CONTACT: BRASS
PLATING:TIN
TEMPERATURE:-20 ° C TO+85 ° C
2.SPECIFICATION:
SIZE:4 TO 60 CIRCUITS
VOLTAGE:50V
CURRENT:1.0A
CONTACT RESISTANCE:20m Ω MAX.
DIELECTRIC WITHSTANDING VOLTAGE:500VAC.

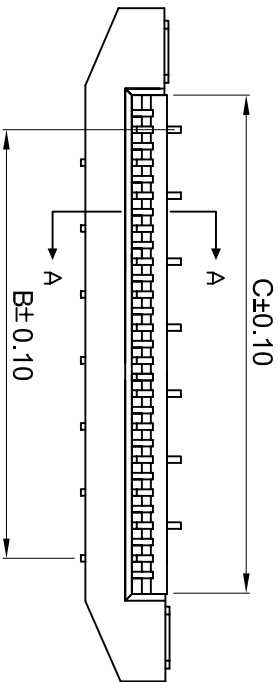

SECTION A-A

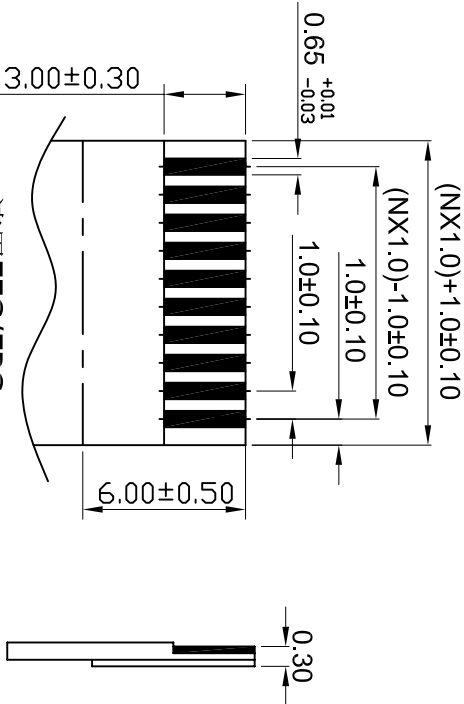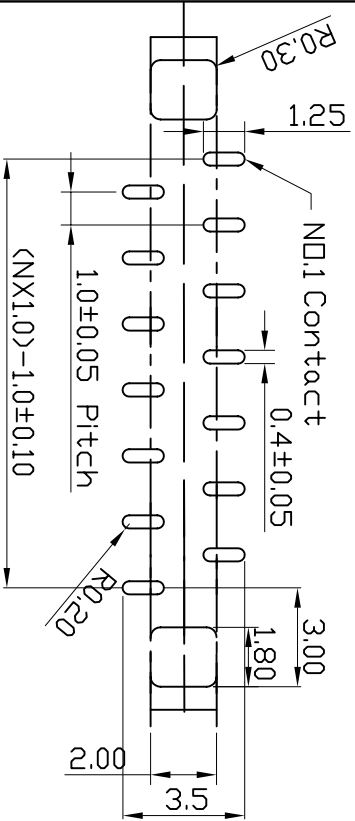

適用FFC/FPC

APPLICABLE FFC/FPC

TOLERANCE (UNLESS SPECIFIED)		REV	A	DR. BY	鄧新偉	MATERIAL
LINEAR	ANGLE	SHEET		CHK. BY		FINISH
X (±0.1)	X° (±1°)		1:1			
XX (±0.05)	X° (±0.1°)	SCALE	mm	APP. BY		DATE
XXX (±0.03)	XX° (±0.01°)	UNIT				PART NO
						FC503-XXF

坤特股份有限公司
QUEENTECH ELECTRONIC CO., LTD

TITLE: P=1.0mm FFC/FPC CONNECTOR
DWG NO.

DIMENSIONS(mm)			
CKT.	Catalog Number	A	B C
02	FC503-02F	8.20	1.00 3.00
03	FC503-03F	9.20	2.00 4.00
04	FC503-04F	10.20	3.00 5.00
05	FC503-05F	11.20	4.00 6.00
06	FC503-06F	12.20	5.00 7.00
07	FC503-07F	13.20	6.00 8.00
08	FC503-08F	14.20	7.00 9.00
09	FC503-09F	15.20	8.00 10.00
10	FC503-10F	16.20	9.00 11.00
11	FC503-11F	17.20	10.00 12.00
12	FC503-12F	18.20	11.00 13.00
13	FC503-13F	19.20	12.00 14.00
14	FC503-14F	20.20	13.00 15.00
15	FC503-15F	21.20	14.00 16.00
16	FC503-16F	22.20	15.00 17.00
17	FC503-17F	23.20	16.00 18.00
18	FC503-18F	24.20	17.00 19.00
19	FC503-19F	25.20	18.00 20.00
20	FC503-20F	26.20	19.00 21.00
21	FC503-21F	27.20	20.00 22.00
22	FC503-22F	28.20	21.00 23.00
23	FC503-23F	29.20	22.00 24.00
24	FC503-24F	30.20	23.00 25.00
25	FC503-25F	31.20	24.00 26.00
26	FC503-26F	32.20	25.00 27.00
27	FC503-27F	33.20	26.00 28.00
28	FC503-28F	34.20	27.00 29.00
29	FC503-29F	35.20	28.00 30.00