

NOTE:

1.MATERIAL:

HOUSING: HEAT RESISTANCE PLASTIC PA46 UL 94V-0
ACTUATOR: HEAT RESISTANCE PLASTIC PA46 UL 94V-0
CONTACT:BRASS

PLATING:TIN

TEMPERATURE:-40°C+85°C

2.SPECIFICATION:






SIZE:2 TO 29 CIRCUITS

VOLTAGE:50V

CURRENT:1.0A

CONTACT RESISTANCE:10mΩMAX.

DIELECTRIC WITHSTANDING VOLTAGE:500V AC.

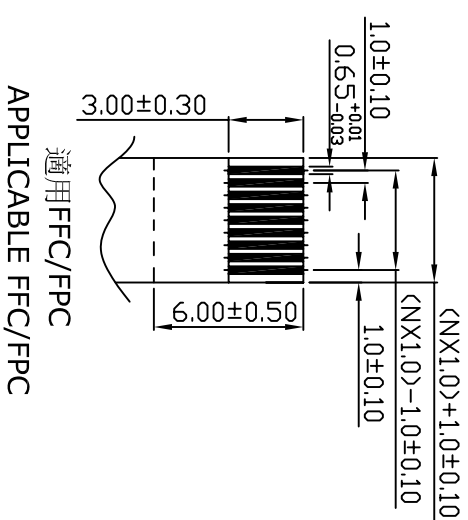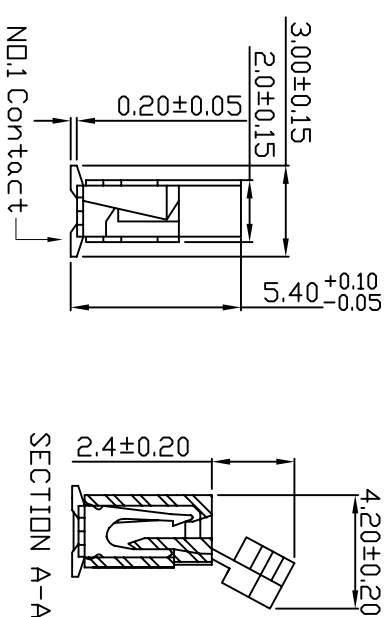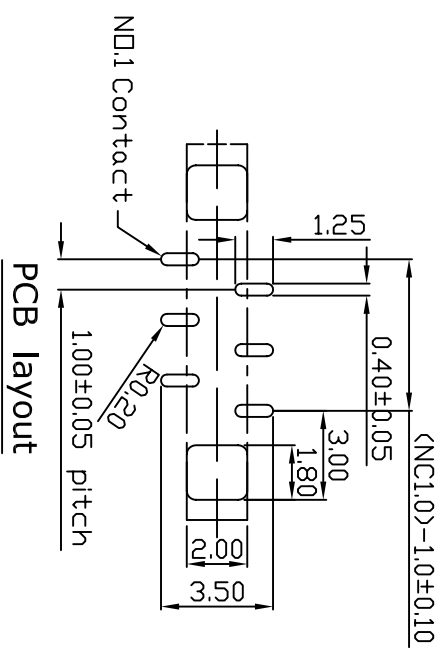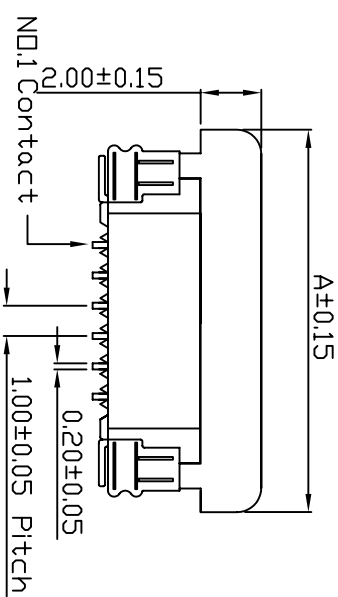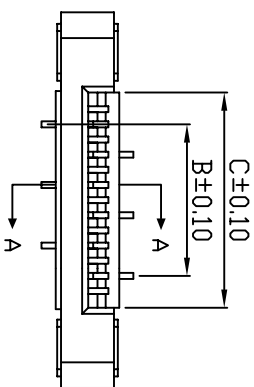

DIMENSIONS(mm)				
CKT.	Catalog Number	A	B	C
02	FC504-02U	8.40	1.00	3.00
03	FC504-03U	9.40	2.00	4.00
04	FC504-04U	10.40	3.00	5.00
05	FC504-05U	11.40	4.00	6.00
06	FC504-06U	12.40	5.00	7.00
07	FC504-07U	13.40	6.00	8.00
08	FC504-08U	14.40	7.00	9.00
09	FC504-09U	15.40	8.00	10.00
10	FC504-10U	16.40	9.00	11.00
11	FC504-11U	17.40	10.00	12.00
12	FC504-12U	18.40	11.00	13.00
13	FC504-13U	19.40	12.00	14.00
14	FC504-14U	20.40	13.00	15.00
15	FC504-15U	21.40	14.00	16.00
16	FC504-16U	22.40	15.00	17.00
17	FC504-17U	23.40	16.00	18.00
18	FC504-18U	24.40	17.00	19.00
19	FC504-19U	25.40	18.00	20.00
20	FC504-20U	26.40	19.00	21.00
21	FC504-21U	27.40	20.00	22.00
22	FC504-22U	28.40	21.00	23.00
23	FC504-23U	29.40	22.00	24.00
24	FC504-24U	30.40	23.00	25.00
25	FC504-25U	31.40	24.00	26.00
26	FC504-26U	32.40	25.00	27.00
27	FC504-27U	33.40	26.00	28.00
28	FC504-28U	34.40	27.00	29.00
29	FC504-29U	35.40	28.00	30.00

適用FFC/FPC
APPLICABLE FFC/FPC

TOLERANCE (UNLESS SPECIFIED)			REV	A	DR. BY	胡三保		MATERIAL
LINEAR	ANGLE	SHEET						
X (± 0.1)	X° ($\pm 1^{\circ}$)				CHK. BY			FINISH
XX (± 0.05)	XX° ($\pm 0.1^{\circ}$)	SCALE	1:1		APP. BY			DATE
XXX (± 0.03)	XXX° ($\pm 0.01^{\circ}$)	UNIT	mm					PART NO
								FC504-XX



坤特股份有限公司
QUEENTECH ELECTRONIC CO.,LTD



TITLE: P=1.0mm FFC/FPC CONNECTOR
DWG. NO.