




版 本	A	B	
	C	D	

NOTE:




- 1.MATERIAL:
HOUSING:NYLON UL 94V-0
CONTACT: BRASS
PLATING:TIN
TEMPERATURE:-20 ° C TO+85 ° C
2.SPECIFICATION:
SIZE:4 TO 60 CIRCUITS
VOLTAGE:50V
CURRENT:1.0A
CONTACT RESISTANCE:20m Ω MAX.
DIELECTRIC WITHSTANDING VOLTAGE:500VAC.

DIMENSIONS(mm)

CKT.	Catalog Number	A	B	C
02	FC504-02F	8.20	1.00	3.00
03	FC504-03F	9.20	2.00	4.00
04	FC504-04F	10.20	3.00	5.00
05	FC504-05F	11.20	4.00	6.00
06	FC504-06F	12.20	5.00	7.00
07	FC504-07F	13.20	6.00	8.00
08	FC504-08F	14.20	7.00	9.00
09	FC504-09F	15.20	8.00	10.00
10	FC504-10F	16.20	9.00	11.00
11	FC504-11F	17.20	10.00	12.00
12	FC504-12F	18.20	11.00	13.00
13	FC504-13F	19.20	12.00	14.00
14	FC504-14F	20.20	13.00	15.00
15	FC504-15F	21.20	14.00	16.00
16	FC504-16F	22.20	15.00	17.00
17	FC504-17F	23.20	16.00	18.00
18	FC504-18F	24.20	17.00	19.00
19	FC504-19F	25.20	18.00	20.00
20	FC504-20F	26.20	19.00	21.00
21	FC504-21F	27.20	20.00	22.00
22	FC504-22F	28.20	21.00	23.00
23	FC504-23F	29.20	22.00	24.00
24	FC504-24F	30.20	23.00	25.00
25	FC504-25F	31.20	24.00	26.00
26	FC504-26F	32.20	25.00	27.00
27	FC504-27F	33.20	26.00	28.00
28	FC504-28F	34.20	27.00	29.00
29	FC504-29F	35.20	28.00	30.00

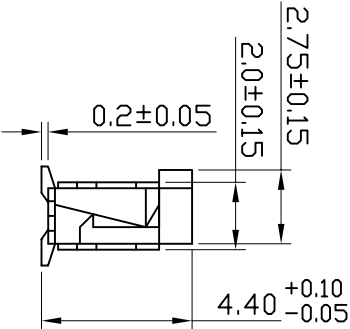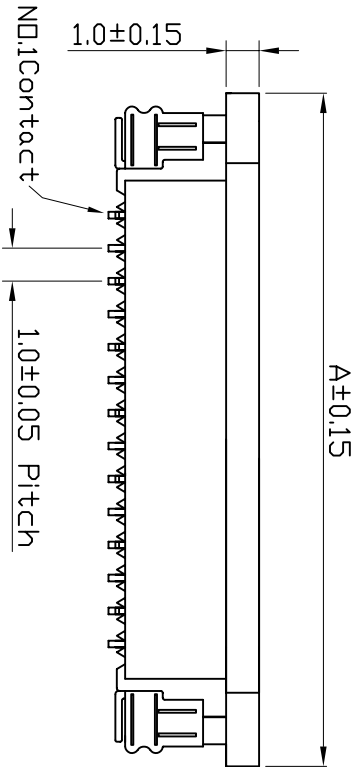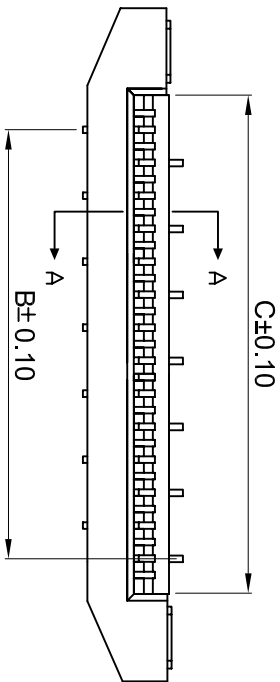

SECTION A-A

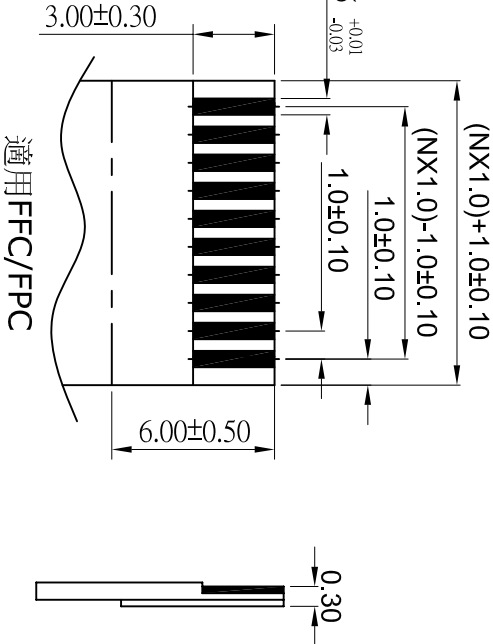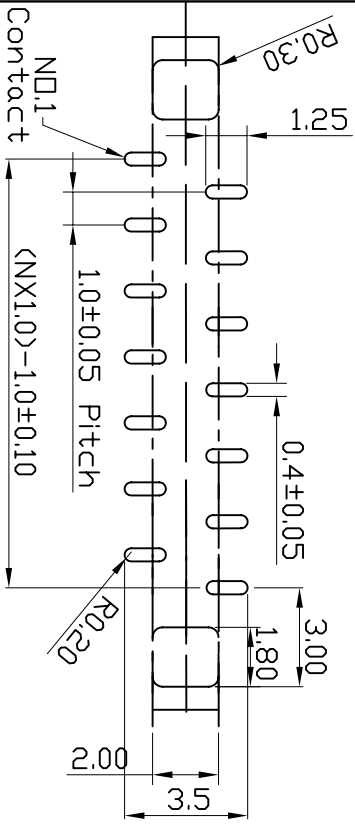

APPLICABLE FFC/FPC

坤特股份有限公司
QUEENTECH ELECTRONIC CO.,LTD

PCB layout

TOLERANCE (UNLESS SPECIFIED)		REV	A	DR. BY	胡三保	MATERIAL
LINEAR	ANGLE	SHEET		CHK. BY		FINISH
X (±0.1)	X° (±1°)					
XX (±0.05)	X° (±0.1°)	SCALE	1:1	APP. BY		DATE
XXX (±0.03)	XX° (±0.01°)	UNIT	mm			PART NO
						FC504-XXF



标题: P=1.0mm FFC/FPC CONNECTOR
DWG NO.