

版 本	A	B
C	D	

NOTE:

1.MATERIAL:

HOUSING:NYLON UL 94V-0

CONTACT:PHOSPHOR BRONZE

PLATING:TIN

TEMPERATURE:-40°C +85°C

2.SPECIFICATION:




SIZE:4 TO 30 CIRCUITS

VOLTAGE:100V



CURRENT:1.0A

CONTACT RESISTANCE:30mΩ MAX.

DIELECTRIC WITHSTANDING VOLTAGE:500V AC.

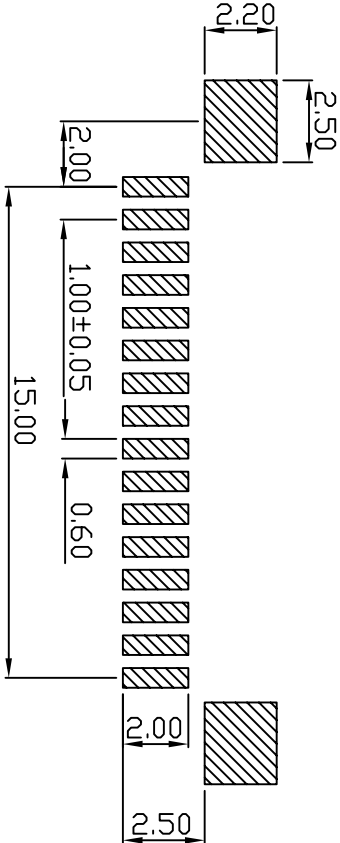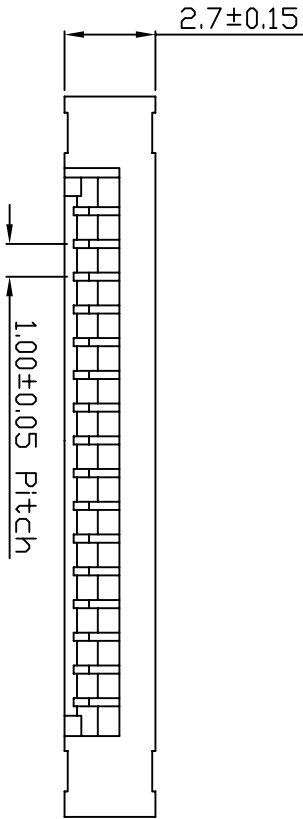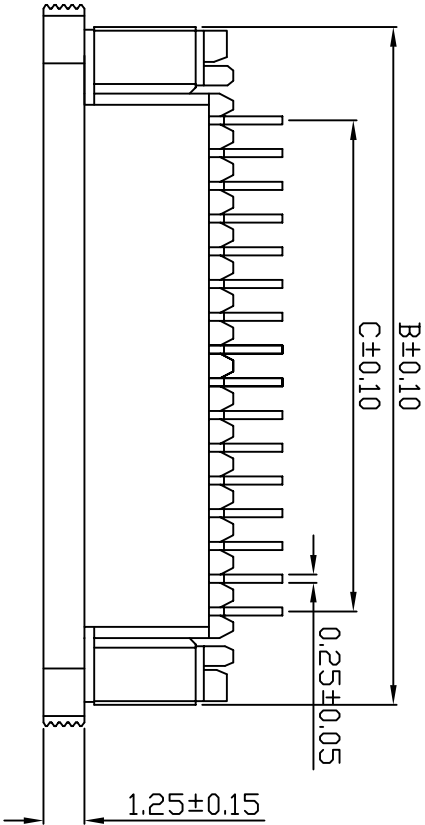

PCB layout

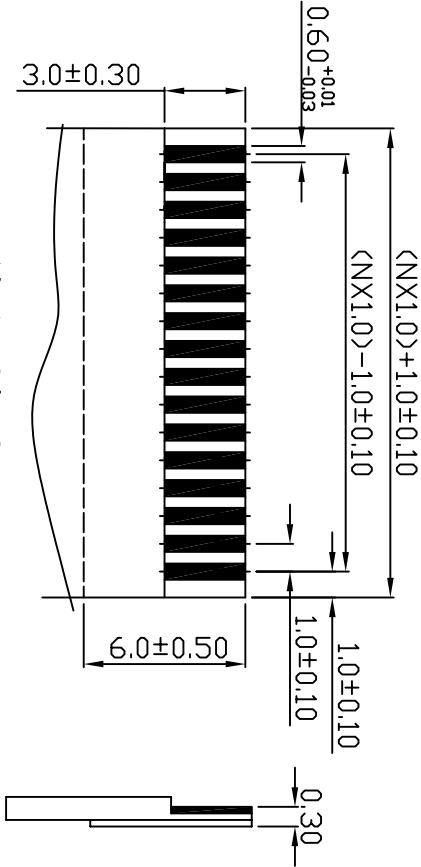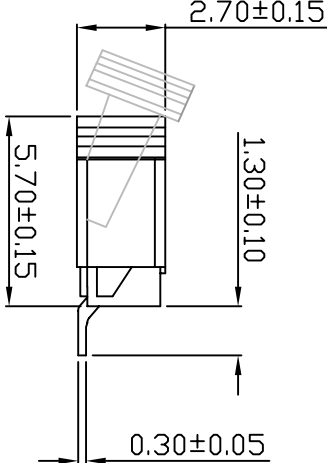

適用FFC/FPC

APPLICABLE FFC/FPC

DIMENSIONS(mm)

CKT.	Catalog Number	A	B	C
04	FC602-04	10.0	8.7	3.00
05	FC602-05	11.0	9.7	4.00
06	FC602-06	12.0	10.7	5.00
07	FC602-07	13.0	11.7	6.00
08	FC602-08	14.0	12.7	7.00
09	FC602-09	15.0	13.7	8.00
10	FC602-10	16.0	14.7	9.00
11	FC602-11	17.0	15.7	10.00
12	FC602-12	18.0	16.7	11.00
13	FC602-13	19.0	17.7	12.00
14	FC602-14	20.0	18.7	13.00
15	FC602-15	21.0	19.7	14.00
16	FC602-16	22.0	20.7	15.00
17	FC602-17	23.0	21.7	16.00
18	FC602-18	24.0	22.7	17.00
19	FC602-19	25.0	23.7	18.00
20	FC602-20	26.0	24.7	19.00
21	FC602-21	27.0	25.7	20.00
22	FC602-22	28.0	26.7	21.00
23	FC602-23	29.0	27.7	22.00
24	FC602-24	30.0	28.7	23.00
25	FC602-25	31.0	29.7	24.00
26	FC602-26	32.0	30.7	25.00
27	FC602-27	33.0	31.7	26.00
28	FC602-28	34.0	32.7	27.00
29	FC602-29	35.0	33.7	28.00
30	FC602-30	36.0	34.7	29.00

TOLERANCE UNLESS SPECIFIED				REV	A	DR. BY	胡三保	MATERIAL
LINEAR	ANGLE	SHEET				CHK. BY		FINISH
X (±0.1)	X° (±1°)		SCALE	1:1	mm	APP. BY		DATE
XX (±0.05)	X° (±0.1°)		UNIT					PART NO
XXX (±0.005)	XX° (±0.01°)							FC602-XX

坤特股份有限公司
QUEENTECH ELECTRONIC CO., LTD

TITLE:H=2.7mm P=1.0mm FFC/FPC CONN
DWG NO.