
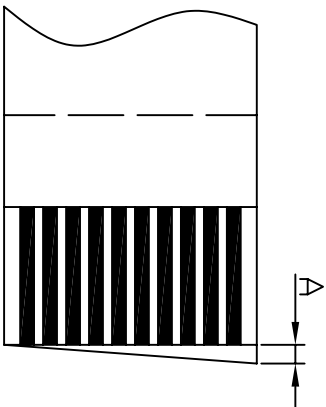
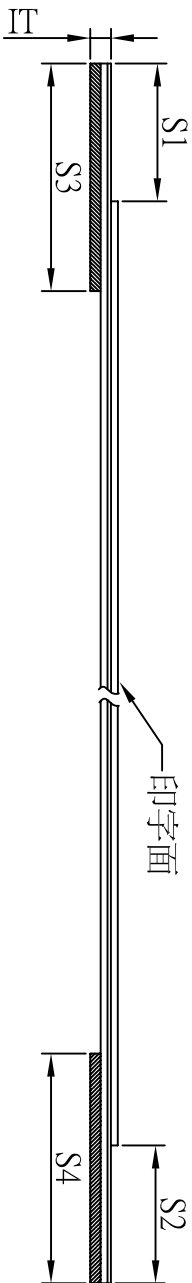
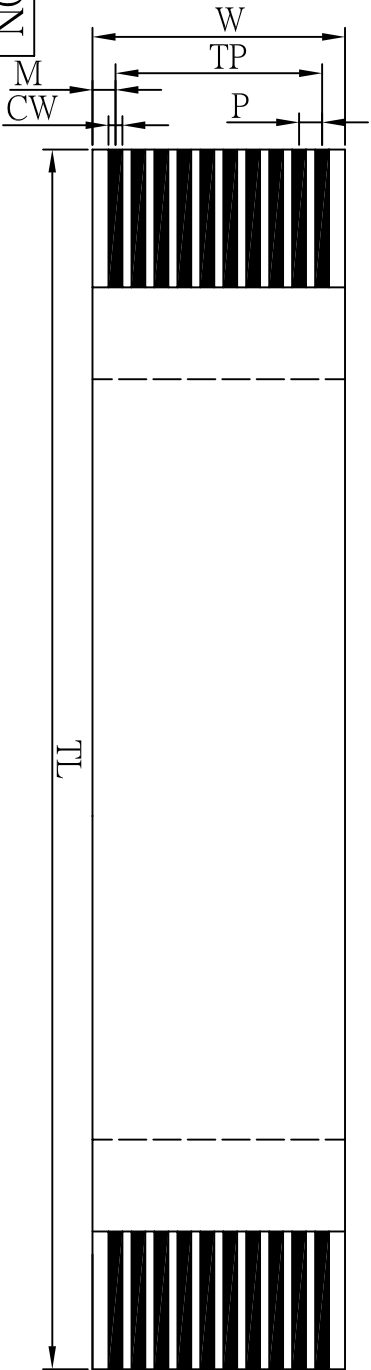




NO	ITEM	SPECIFITION
---	Number of Conductor(導體數)	4
P	Pitch(間距)	0.5±0.05
TP	Total Pitch(總間距)	1.5±0.08
W	Width(總寬度)	2.5±0.08
M	Margin(邊緣寬度)	0.5±0.08
TL	Total Length(總長度)	330.0±5.0
IT	Insertion Thickness(插入厚度)	0.30±0.05
S1/S2	Conductor strip Length(導體裸露長度)	S1=4.0±0.5 S2=4.0±0.5
S3/S4	Supporting Tape Length(補強板長度)	S3=6.0±1.0 S4=6.0±1.0
Ct	Conductor Thickness(導體厚度)	0.035±0.005
Cw	Conductor Width(導體寬度)	0.30±0.03
A	Slanting(線口傾斜度)	A<0.5
---	Supporting Tape Color(補強板顏色)	Blue(藍色)
---	Supporting Tape Spec.(補強板規格)	LEB188-225 -12
---	Insulation Spec.(絕緣膠規格)	43 μm
---	Storage Temperature(保存溫度)	15°C~30°C
UL	UL style(UL 型號)	AWM 20624

										MATERIAL:				DRAWING BY: 劉敏		 坤特電子(深圳)有限公司 QUEENTECH ELECTRONIC CO., LTD PART NO : FFC2A040330440606AT MODEL: CUST NO : DWG NO: TITLE: FLEXIBLE FLAT CABLE Pitch=0.5mm L=330.0mm 04Pin A TYPE THIRD ANGLE PROJECTION 			
										UNIT		mm		CHECKED BY:					
										.XXX		±0.03		±1°			APPROVED BY:		
										.XX		±0.05					SCALE :		1:1
										.X		±0.10					REV:		A
										LINEAR		ANGLE							
										GENERAL TOLERANCES									
										DRG		CHK		DATE			2009-09-24		
										RELEASE									
										REVISION RECORD									
										LTR									