

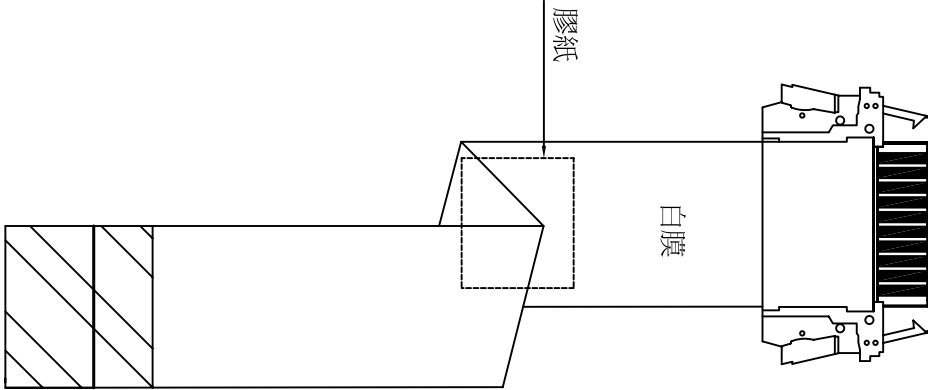



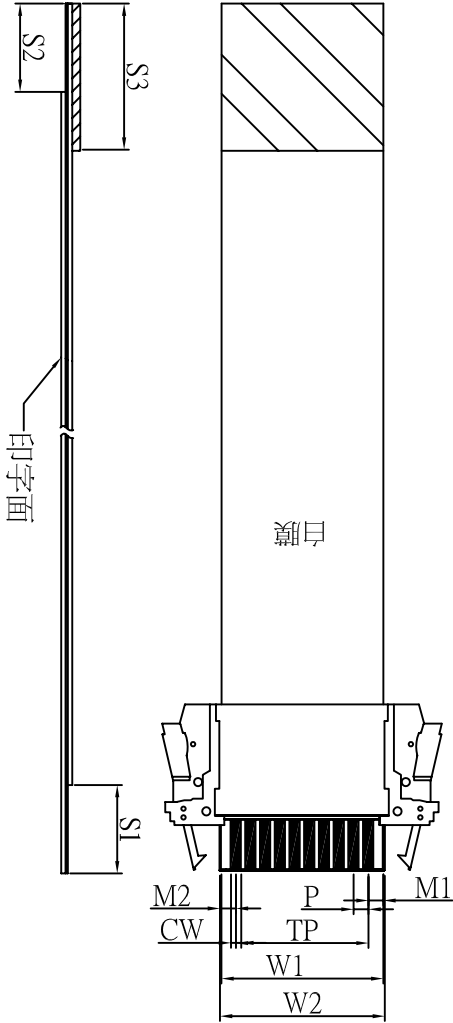

NO	ITEM	SPECIPTTON
---	Number of Conductor(導體數)	30
P	Pitch(間距)	1.0±0.10
TP	Total Pitch(總間距)	29.0±0.15
W1	Width(總寬度)	31.0±0.15
W2	Width(總寬度)	31.98±0.15
M1	Margin(邊緣寬度)	1.0±0.12
M2	Margin(邊緣寬度)	1.5±0.15
TL	Total Length(總長度)	106±2
IT	Insertion Thickness(插入厚度)	0.32±0.03
S1/S2	Conductor strip Length(導體裸露長度)	S1=2.5±0.7 S2=4.0±1.0
S3/S4	Supporting Tape Length(補強板長度)	S3=6.0±2.0
Ct	Conductor Thickness(導體厚度)	0.05±0.01
Cw	Conductor Width(導體寬度)	0.7±0.03
A	Slanting(線口傾斜度)	A<0.5
---	Supporting Tape Color(補強板顏色)	Blue(藍色)
---	Supporting Tape Spec.(補強板規格)	LEB188-225
---	Insulation Spec.(絕緣膠規格)	60 μm
---	Storage Temperature(保存溫度)	15°C-30°C



- 注：
- 1：成品反折方式如圖示。反折後兩面用膠紙固定。
 - 2：成品補強板端4.0±0.5處畫黑色標示線，LW=0.5
 - 3：鍍金 3 μm

		MATERIAL:		DRAWING BY: 胡三保		坤特電子（深圳）有限公司			
		UNIT		CHECKED BY:					
		mm							
		.XXX ±0.03		APPROVED BY:					
		.XX ±0.05							
A	RELEASE	胡三保		SCALE :		1:1			
LTR	REVISION RECORD	DRG		REV :		A			
		CHK							
		DATE							
		GENERAL TOLERANCES							
		ANGLE							
		GENERAL TOLERANCES							