
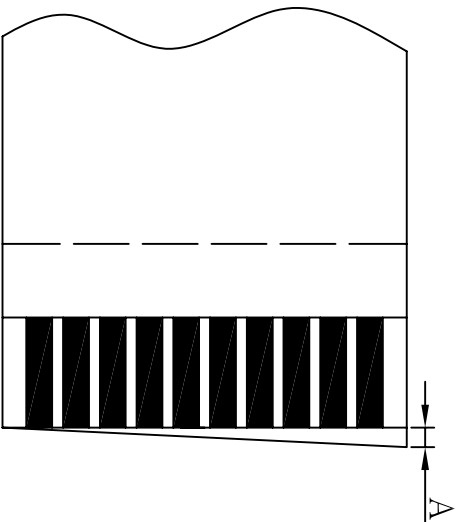
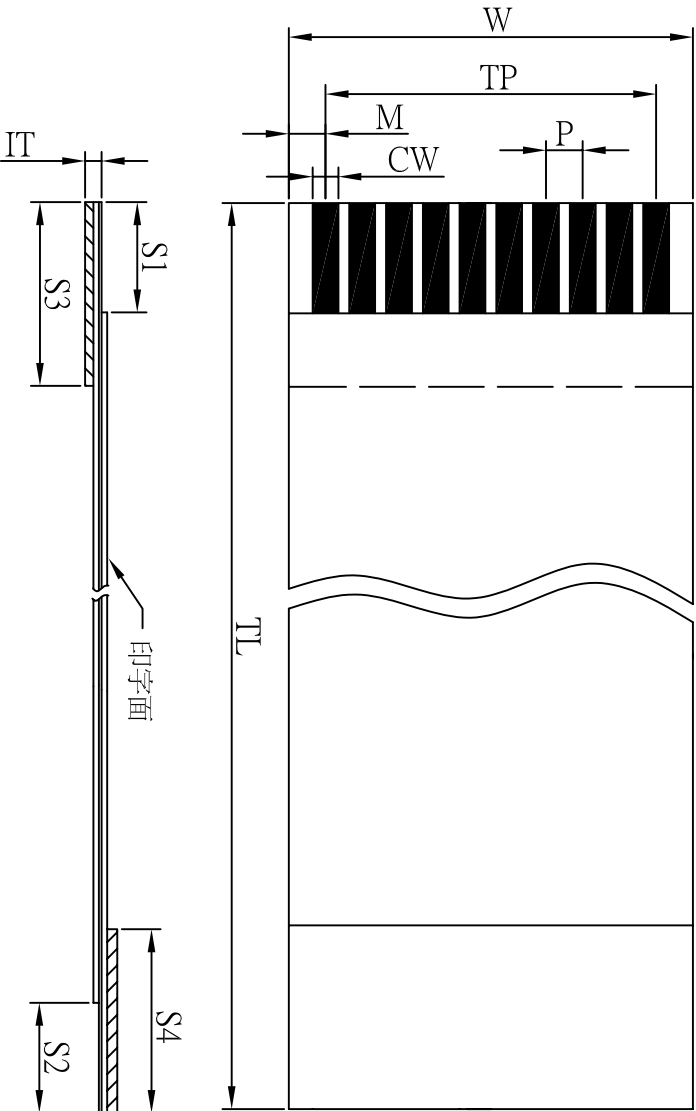


NO	ITEM	SPECIFICATION
---	Number of Conductor(導體數)	30
P	Pitch(間距)	1.25±0.08
TP	Total Pitch(總間距)	36.25±0.12
W	Width(總寬度)	38.75±0.12
M	Margin(邊緣寬度)	1.25±0.12
TL	Total Length(總長度)	85±2
IT	Insertion Thickness(插入厚度)	0.30±0.03
S1/S2	Conductor strip Length(導體裸露長度)	S1=4.0±0.5 S2=4.0±0.5
S3/S4	Supporting Tape Length(補強板長度)	S3=8±1.5 S4=8.0±1.5
Ct	Conductor Thickness(導體厚度)	0.10±0.01
Cw	Conductor Width(導體寬度)	0.8±0.05
A	Slanting(線口傾斜度)	A<0.5
---	Supporting Tape Color(補強板顏色)	Blue(藍色)
---	Supporting Tape Spec.(補強板規格)	LEB125-155-16
---	Insulation Spec.(絕緣膠規格)	43 μ m(PET)
---	Storage Temperature(保存溫度)	15°C~30°C
UL	UL style (UL 型號)	AWM 20624



				MATERIAL:		DRAWING BY: 劉敏		 坤特電子(深圳)有限公司 QUEENTECH ELECTRONIC CO.,LTD	
				UNIT mm		CHECKED BY:			
				.XXX ±0.03		APPROVED BY:			
				.XX ±0.05		SCALE : 1:1			
				.X ±0.10		ANGLE			
A				LINEAR		REV: A			
RELEASE				GENERAL TOLERANCES					
REVISION RECORD				DATE 2009-10-15					
L7R				DRG		CHK			