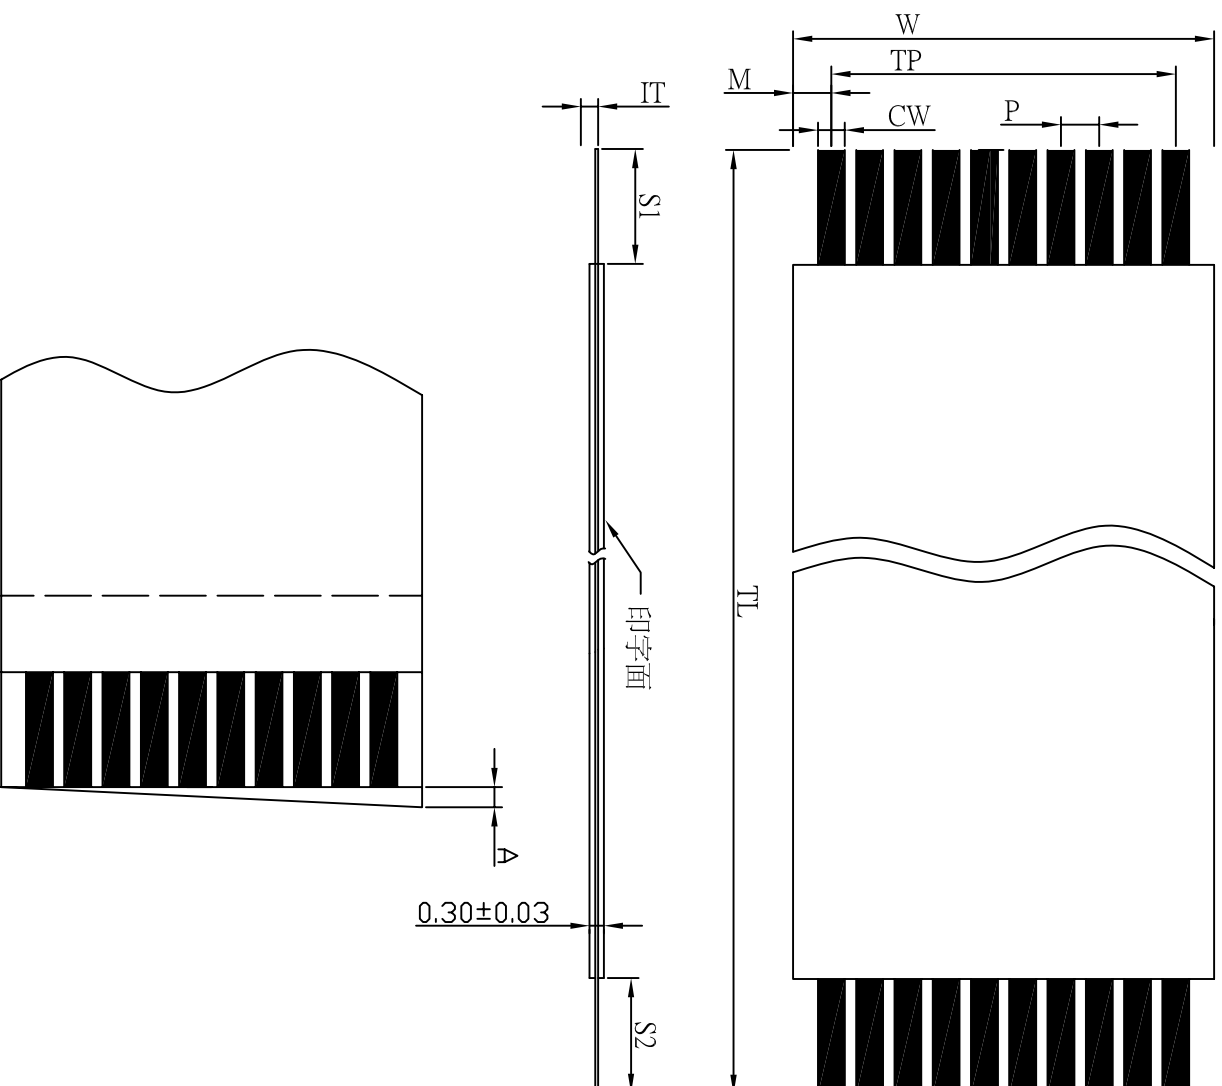


NO	ITEM	SPECIFTION
---	Number of Conductor(導體數)	16
P	Pitch(間距)	2.54±0.15
TP	Total Pitch(總間距)	38.10±0.10
W	Width(總寬度)	42±0.15
M	Margin(邊緣寬度)	2.0±0.15
TL	Total Length(總長度)	50±2.0
IT	Insertion Thickness(插入厚度)	0.00±0.00
S1/S2	Conductor strip Length(導體裸露長度)	S1=3±0.5 S2=3±0.5
S3/S4	Supporting Tape Length(補強板長度)	S3=00.0±0.0
Ct	Conductor Thickness(導體厚度)	0.10±0.005
Cw	Conductor Width(導體寬度)	1.27±0.03
A	Slanting(線口傾斜度)	A<0.5
---	Supporting Tape Color(補強板顏色)	
---	Supporting Tape Spec.(補強板規格)	
---	Insulation Spec.(絕緣膠規格)	100 μ m (PET)
---	Storage Temperature(保存溫度)	15°C~30°C
UL	UL Style(UL 型號)	AWM 2896

[illegible]