
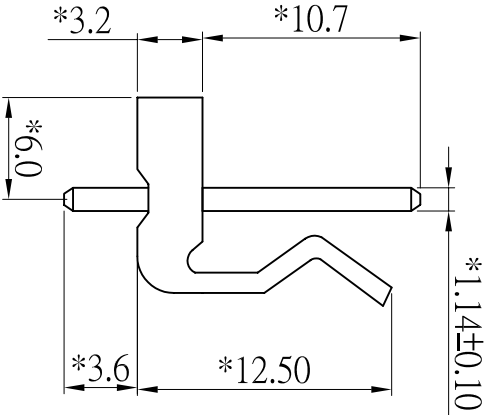

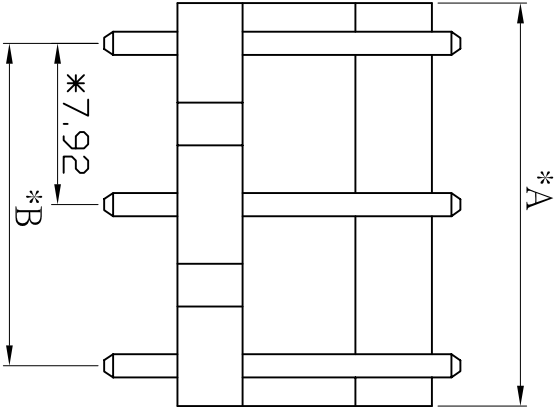


版 本	A	B
	C	D

SPECIFICATION:

- 1.POLE:2-18
- 2.MATERIALS
INSULATOR:NYLON-66(UL 94V-2)
- CONTACT :BRASS
- CONTACT PLATED:TIN OVER NICKEL
- 3.ELECTRICAL
VOLTAGE RATING:AC 500V
CURRENT RATING:AC,DC 7A
- INSULATOR RESISTANCE:1000 Megohms Min
- WITHSTANDING VOLTAGE:1500V
- 4.ENVIRONMENTAL
TEMPERATURE RANGE:-25°C TO +130°C
- 5.ALL DIMENSION ARE IN MMS
- 6.APPLICATION P.C.B THICKNESS:0.063"(1.6mm)

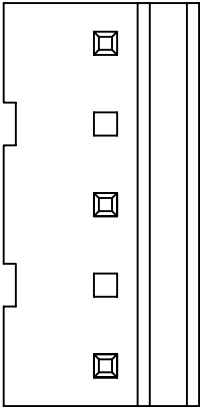

Poles	Dimension(mm)	
	A(mm)	B(mm)
3	11.88	7.92
4	15.84	11.88
5	19.80	15.84
6	23.76	19.80
7	27.72	23.76
8	31.68	27.72
9	35.64	31.68
10	39.60	35.64
11	43.56	39.60
12	47.52	43.56
13	51.48	47.52
14	55.44	51.48
15	59.40	55.44
16	63.36	59.40

PCB LAYOUT

TOLERANCE UNLESS SPECIFIED		REV	A	DR, BY	鄭陽生	MATERIAL
LINEAR	0.0±0.30	SHEET		CHK, BY		FINISH
ANGLE	0.00±0.20	SCALE	1:1	APP, BY		DATE
	±1°	UNIT	MM			2008-08-08
						MX900-XXS

		坤特電子(深圳)有限公司 QUEENTECH ELECTRONIC CO., LTD
	TITLE: MOLEX PITCH=3.96mm 5PIN 抽第2、4PIN 180° DWG NO.	