

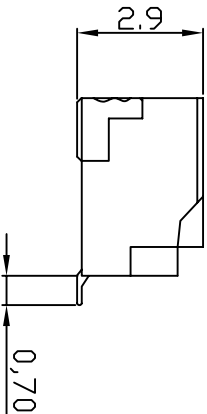
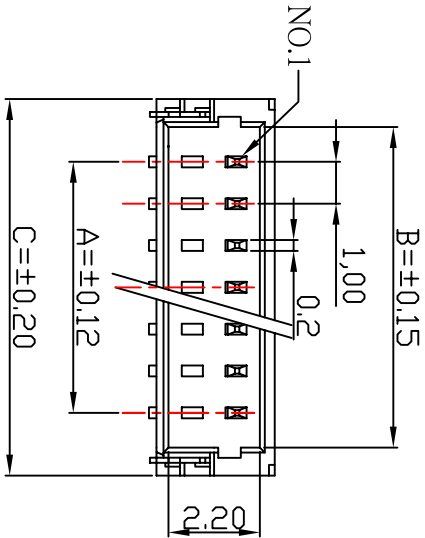


版 本	A	B
	C	D

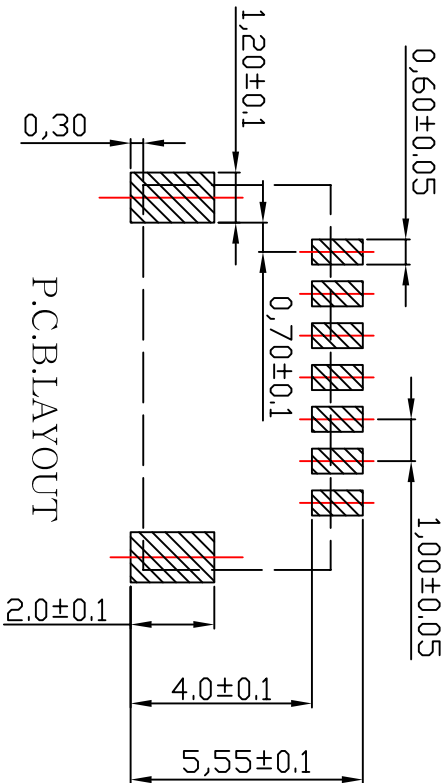

Specifications:
Electrical
*Rated Voltage: 50v AC,DC
*Rated Current: 1A
*Withstand voltage: 500V AC/min
*Contact resistance: 20m Ω (MAX)
*Insulation resistance: 100 M Ω (MIN)
*Temperature range:-25°C~+85°C
Material and finish:
*Circuits: 2~20
*Material:High Temperature plastic UL94-0

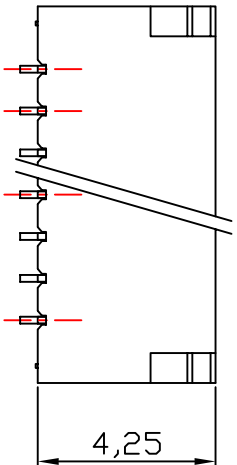

Pin 數	A	B	C
2	1.0	2.4	4.0
3	2.0	3.4	5.0
4	3.0	4.4	6.0
5	4.0	5.4	7.0
6	5.0	6.4	8.0
7	6.0	7.4	9.0
8	7.0	8.4	10.0
9	8.0	9.4	11.0
10	9.0	10.4	12.0
11	10.0	11.4	13.0
12	11.0	12.4	14.0
13	12.0	13.4	15.0
14	13.0	14.4	16.0
15	14.0	15.4	17.0
16	15.0	16.4	18.0
17	16.0	17.4	19.0
18	17.0	18.4	20.0
19	18.0	19.4	21.0
20	19.0	20.4	22.0
21	20.0	21.4	23.0

TOLERANCE (UNLESS SPECIFIED)		REV	A	DR. BY	鄭 陽 生	MATERIAL
LINEAR	ANGLE	SHEET		CHK. BY		FINISH
X* (±0.1)	X* (±1°)					
XX (±0.05)	X* (±0.1°)	SCALE	1:1	APP. BY		DATE
XXX (±0.005)	XX* (±0.01°)	UNIT	mm			2008-05-14
						DWG NO.



坤特電子(深圳)有限公司
QUENTECH ELECTRONIC CO., LTD

TITLE: Wafer p=1.0mm 180度 SMT
PART NO: WR501-XXS