

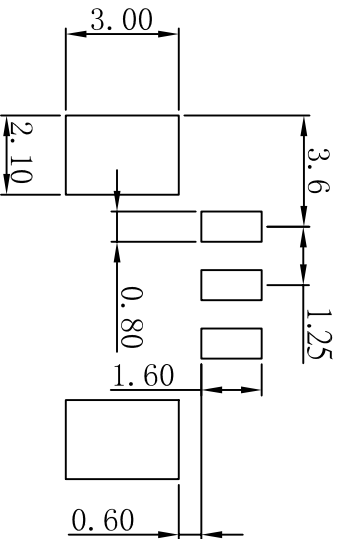
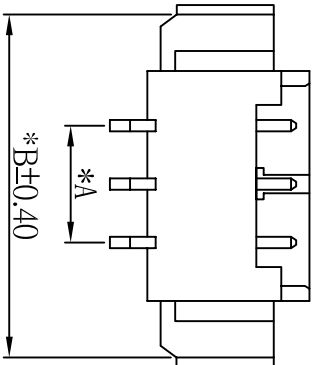


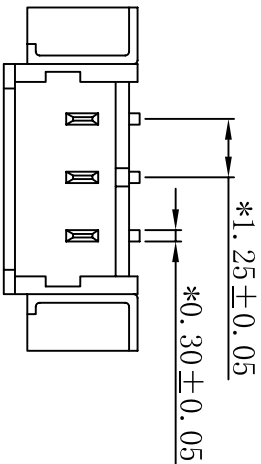

P. C. B LAYOUT

A	RELEASE	胡三保		2009-07-23
L/R	REVISION RECORD	DRG	CHK	DATE

P / N	DIMENSION (mm)	
	A (mm)	B (mm)
WR600-02R	1.25	7.25
WR600-03R	2.50	8.50
WR600-04R	3.75	9.75
WR600-05R	5.00	11.00
WR600-06R	6.25	12.25
WR600-07R	7.50	13.50
WR600-08R	8.75	14.75
WR600-09R	10.00	16.00
WR600-10R	11.25	17.25
WR600-11R	12.50	18.50
WR600-12R	13.75	19.75
WR600-13R	15.00	21.00
WR600-14R	16.25	22.25
WR600-15R	17.50	23.50



NOTES:

MATERIAL: PIN/POST: BRASS TIN-PLATED
WAFER: NYLON 46 UL94V-0
CIRCUITS: 2-15 CIRCUITS AVAILABLE
INSULATION RESISTANCE: 1000MΩ MIN
WITHSTAND VOLTAGE: 800V AC/MINUTE
CURRENT RATING: 1A AC/DC
VLTAGE RATING: 100V AC/DC

MATERIAL:		DRAWING BY:	胡三保			
FINISH:		CHECKED BY:				
.XXX	±0.10	±1°	APPROVED BY:			
.XX	±0.20		SCALE :	1:1		
.X	±0.30		REV:	A		
L INEAR		ANGLE				
GENERAL TOLERANCES						
QT 坤特電子(深圳) 有限公司 QUEENTECH ELECTRONIC CO., LTD						
PART NO :		WR600-XXR	MODEL:			
CUST NO :			DWG NO:			
TITLE:		WAFER PITCH=1.25mm			90°	
THIRD ANGLE PROJECTION						

