

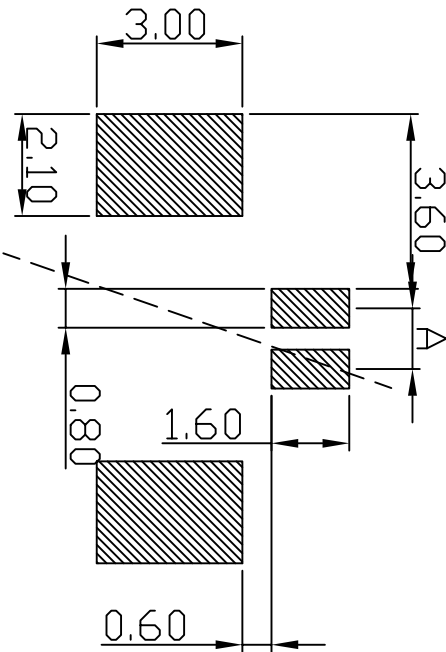
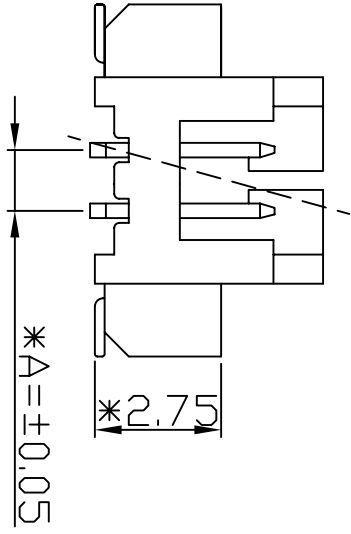


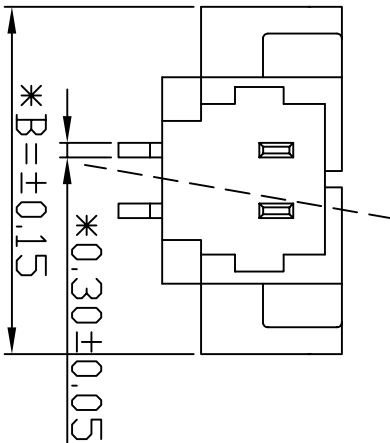

P.C.B LAYOUT

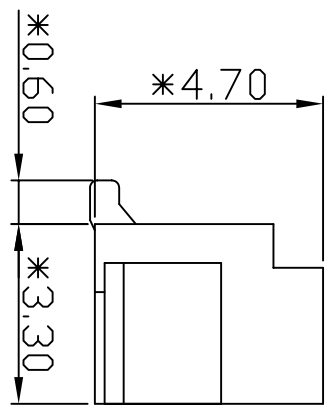

Material
pin/post: Brass tin-plated
wafer: Nylon 46 UL94V-0
Circuits: 2-15circuits available
Insulation resistance: 1000MΩ min
Withstand voltage: 800V AC/minute
Current rating: 1A AC/DC
Voltage rating: 100V AC/DC

PRAT NO	A	B
WR600-02S	1.25	7.25
WR600-03S	2.50	8.50
WR600-04S	3.75	9.75
WR600-05S	5.00	11.00
WR600-06S	6.25	12.25
WR600-07S	7.50	13.50
WR600-08S	8.75	14.75
WR600-09S	10.00	16.00
WR600-10S	11.25	17.25
WR600-11S	12.50	18.50
WR600-12S	13.75	19.75
WR600-13S	15.00	21.00
WR600-14S	16.25	22.25
WR600-15S	17.50	23.50
WR600-16S	18.75	24.75

MATERIAL:		DRAWING BY: 鄭陽生		PART NO : CUST NO :		WR600-XXS /		DWG NO:	
FINISH:		CHECKED BY:		TITLE:		WAFER PITCH=1.25mm 180° SMT			
.XXX ±0.10				REV:		A			
.XX ±0.20									
.X ±0.30									
LINEAR ANGLE									
GENERAL TOLERANCES									
LTR		RELEASE		DATE		2007-11-20			
DRG		CHK							