
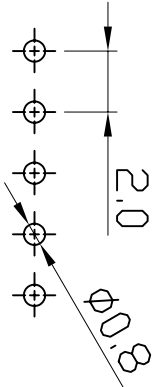




版 本	A	B
	C	D

SPECIFICATIONS

- 1.POLES:2-16
- 2.MATERIALS
INSULATOR:Nylon-66(UL 94V-0)
CONTACT:Brass Tin/Plated
- 3.ELECTRICAL
VOLTAGE RATING:AC 250V(R.M.S.)
CURRENT RATING:2 AMP
- INSULATOR RESISTANCE:1000 MEGOHMS MIN
WITHSTANDING VOLTAGE:AC 800V(R.M.S.)
- 4.ENVIRONMENTAL
TEMPERATURE RANGE:-25°C TO +85°C
- 5.ALL DIMENSION ARE IN MMS
- 6.APPLICATION P.C.B. THICKNESS:0.031"~0.063"(0.8~1.6mm)

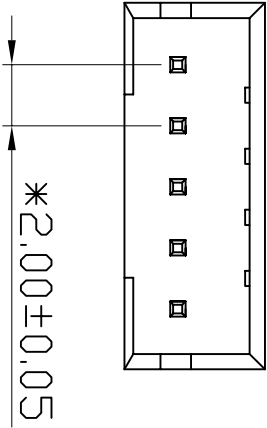

P.C.B LAYOUT

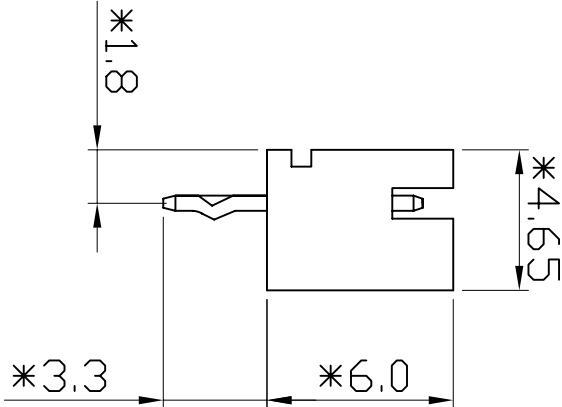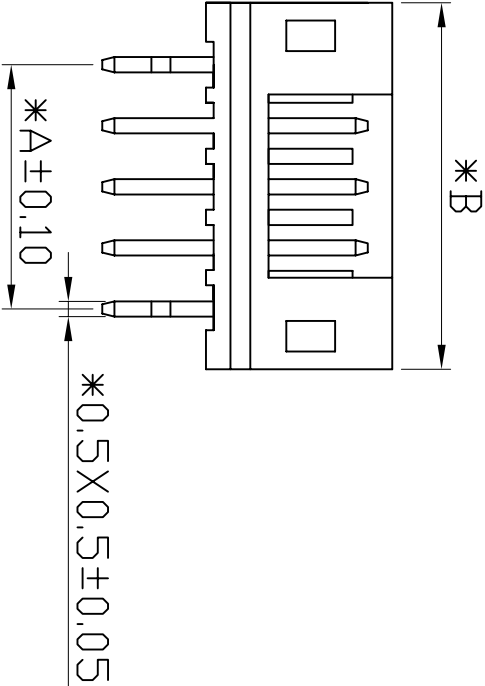

Ordering Information & Dimensions

PART NO.	Dimensions(mm)	
	A	B
WR800-2S	2.00	6.00
WR800-3S	4.00	8.00
WR800-4S	6.00	10.00
WR800-5S	8.00	12.00
WR800-6S	10.00	14.00
WR800-7S	12.00	16.00
WR800-8S	14.00	18.00
WR800-9S	16.00	20.00
WR800-10S	18.00	22.00
WR800-11S	20.00	24.00
WR800-12S	22.00	26.00
WR800-13S	24.00	28.00
WR800-14S	26.00	30.00
WR800-15S	28.00	32.00
WR800-16S	30.00	34.00

TOLERANCE (UNLESS SPECIFIED)		REV	A	DR. BY	鄭陽生	MATERIAL	
LINEAR	0.05±0.30	SHEET		CHK. BY		FINISH	
ANGLE	±1°	SCALE	1:1	APP. BY		DATE	2008-05-29
		UNIT	mm			PART NO	WR800-XXS



坤特電子（深圳）有限公司
QUEENTECH ELECTRONIC CO.,LTD



TITLE: WAFER P=2.00mm 四面包180°
DWG NO.