

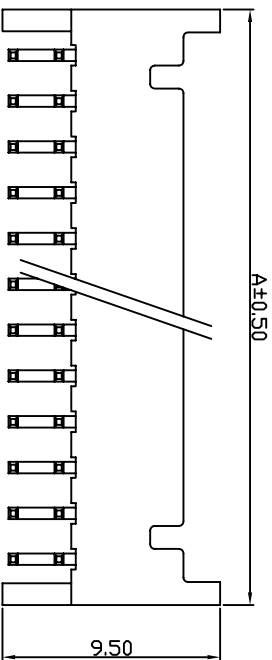


版 本	A	B	
	C	D	

MATERIALS

- 1.CONTACT RESISTANCE:20m ohms Max
1.CONTACT:BRASS
2.MATERIAL:GLASS-FILLED NYLON-66(UL 94V-0)
3.CONTACT PLATING:Brass Plated With 100u" Tin/Lead
Over Nickel
SPECIFICATION
2.INSULATOR RESISTANCE:1000M ohms Min
3.CURRENT RATING: 3 Amp
4.DIELECTRIC WITHSTANDING VOLTAGE:AC 500V
5.OPERATING TERPERATURE:-55° C TO +105°

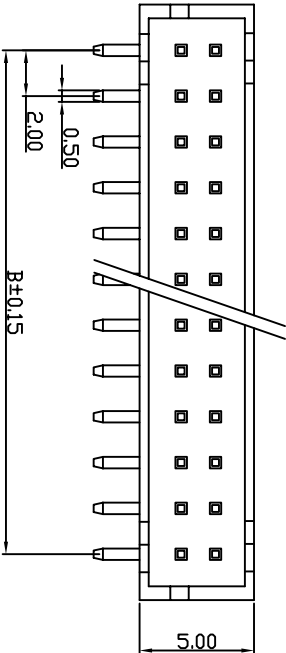

PIN數	DIMENSION(mm)	
	A(mm)	B(mm)
4	5.90	2.00
6	7.90	4.00
8	9.90	6.00
10	11.90	8.00
12	13.90	10.00
14	15.90	12.00
16	17.90	14.00
18	19.90	16.00
20	21.90	18.00
22	23.90	20.00
24	25.90	22.00
26	27.90	24.00
28	29.90	26.00
30	31.90	28.00
32	33.90	30.00
34	35.90	32.00
36	37.90	34.00

TOLERANCE UNLESS SPECIFIED			REV	A	DR, BY
LINEAR	0.0±0.30	SHEET			胡三保
	0.00±0.20	SCALE	1:1		CHK, BY
ANGLE	±1°	UNIT	MM		APP, BY
			PART NO	WR802-XXR	

QT 坤特電子(深圳) 有限公司 QUEENTECH ELECTRONIC CO., LTD			TITLE:	WAFER P=2.00mm	90° DIP
			DWG NO.		