
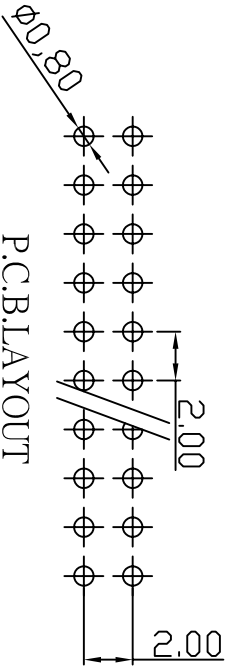
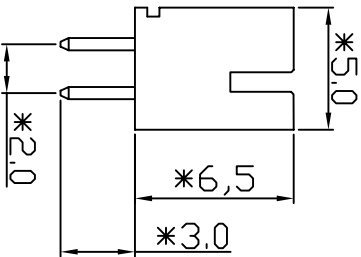
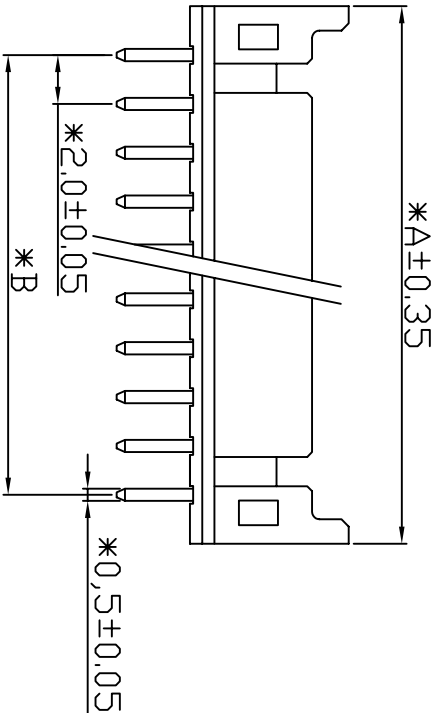


版 本	A	B	
	C	D	

MATERIALS

- 1.CONTACT RESISTANCE:20m ohms Max
1.CONTACT:BRASS
2.MATERIAL:GLASS-FILLED NYLON-66(UL 94V-0)
3.CONTACT PLATING::Brass Plated With 100u" Tin/Lead
Over Nickel
SPECIFICATION
2.INSULATOR RESISTANCE:1000M ohms Min
3.CURRENT RATING: 3 Amp
4.DIELECTRIC WITHSTANDING VOLTAGE:AC 500V
5.OPERATING TEMPERATURE:-55°C TO +105°

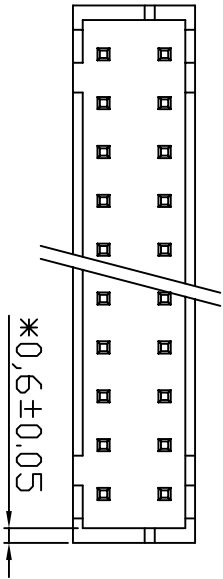

P.C.B.LAYOUT

PIN數	DIMENSION(mm)	
	A(mm)	B(mm)
4	5.90	2.00
6	7.90	4.00
8	9.90	6.00
10	11.90	8.00
12	13.90	10.00
14	15.90	12.00
16	17.90	14.00
18	19.90	16.00
20	21.90	18.00
22	23.90	20.00
24	25.90	22.00
26	27.90	24.00
28	19.90	26.00
30	31.90	28.00
32	33.90	30.00
34	35.90	32.00

TOLERANCE UNLESS SPECIFIED		REV	A	DR, BY	鄭 陽 生	MATERIAL	
LINEAR		SHEET		CHK, BY		FINISH	
0.00±0.20		SCALE	1:1	APP, BY		DATE	2008-05-24
ANGLE	±1°	UNIT	MM			PART NO	WR802-XXS

QT

坤特電子(深圳) 有限公司

QUEENTECH ELECTRONIC CO., LTD

TITLE:

WARER PITCH=2.0mm 雙排 180°

DWG NO.