
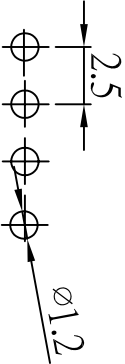

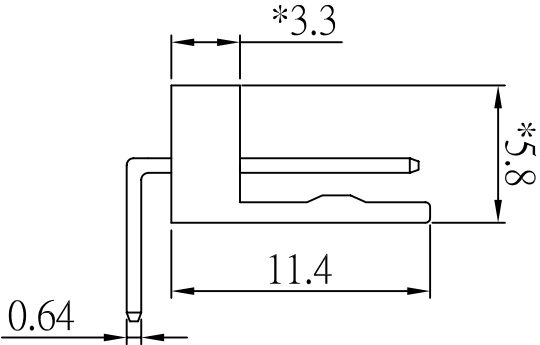


版 本	A	B	
	C	D	

SPECIFICATION:

- 1.MATERIALS
INSULATOR:NYLON-66(UL 94V-0)
CONTACT:BRASS TIN/PLATED
- 2.ELECTRICAL
VOLTAGE RATING:AC 250V(R.M.S)
CURRENT RATING:1 AMP
INSULATOR RESISTANCE:1000 Megohms Min
WTHSTANDING VOLTAGE:AC 250V (R.M.S)
- 3.ENVIRONMENTAL
TEMPERATURE RANGE:-55°C TO +85°C
- 4.ALL DIMENSION ARE IN MMS
- 5.APPLICATION P.C.B THICKNESS:0.063"(1.6mm)

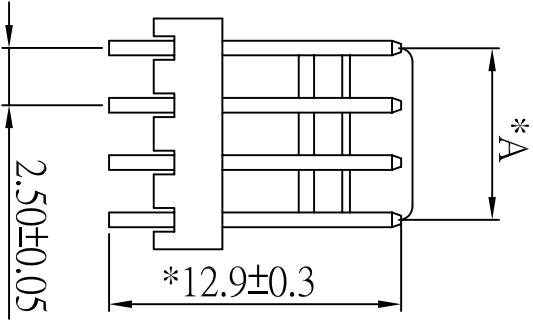

PCB LAYOUT

	DIMENSION(mm)	
	A	B
WR903-02R	2.5	5.0
WR903-03R	5.0	7.5
WR903-04R	7.5	10.0
WR903-05R	10.0	12.5
WR903-06R	12.5	15.0
WR903-07R	15.0	17.5

TOLERANCE UNLESS SPECIFIED		REV	A	DR. BY		胡三保	MATERIAL	
LINEAR	0.0±0.30	SHEET		CHK. BY			FINISH	
	0.00±0.20	SCALE	1:1			DATE	2008-12-31	
ANGLE	±1°	UNIT	MM	APP. BY		PART NO	WR903-XXR	
								
							QT 坤特電子(深圳) 有限公司 QUEENTECH ELECTRONIC CO., LTD	
							TITLE: WATER PITH=2.50mm 90° 4PIN	
							DWG NO.	

QT

坤特電子(深圳) 有限公司
QUEENTECH ELECTRONIC CO., LTD