

版 本	A	B	
	C	D	

SPECIFICATION:

1.MATERIALS

INSULATOR:NYLON-66(UL 94V-0)

CONTACT:BRASS TIN/PLATED

2.ELECTRICAL

VOLTAGE RATING:AC 250V(R.M.S)

CURRENT RATING:1 AMP

INSULATOR RESISTANCE:1000 Megohms Min




WITHSTANDING VOLTAGE:AC 250V (R.M.S)

3.ENVIRONMENTAL


TEMPERATURE RANGE:-55°C TO +85°C

4.ALL DIMENSION ARE IN MMS

5.APPLICATION P.C.B THICKNESS:0.063"(1.6mm)

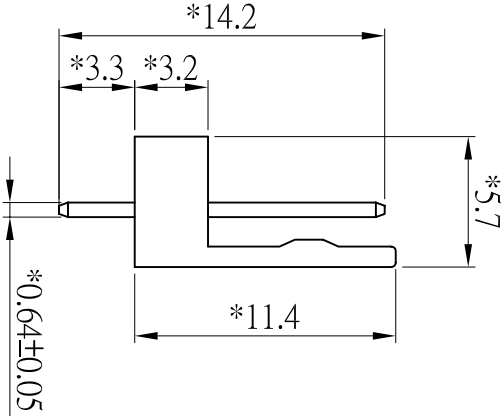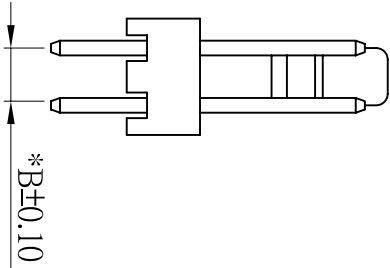

PART NO.	A(mm)	B(mm)
WR903-02S	5.00	2.50
WR903-03S	7.50	5.00
WR903-04S	10.00	7.50
WR903-05S	12.50	10.00
WR903-06S	15.00	12.50
WR903-07S	17.50	15.00
WR903-08S	20.00	17.50
WR903-09S	22.50	20.00
WR903-10S	25.00	22.50



PCB LAYOUT

TOLERANCE UNLESS SPECIFIED		REV	A	DR, BY	鄭陽生	MATERIAL
LINEAR	0.0±0.30	SHEET		CHK, BY		FINISH
ANGLE	0.00±0.20	SCALE	1:1	APP, BY		DATE
	±1°	UNIT	MM			2007-11-09
						WR903-XXS

QT 坤特電子(深圳)有限公司 QUEENTECH ELECTRONIC CO., LTD			TITLE:	MOLEX PTH=2.5mm 180°
DWG NO.				