
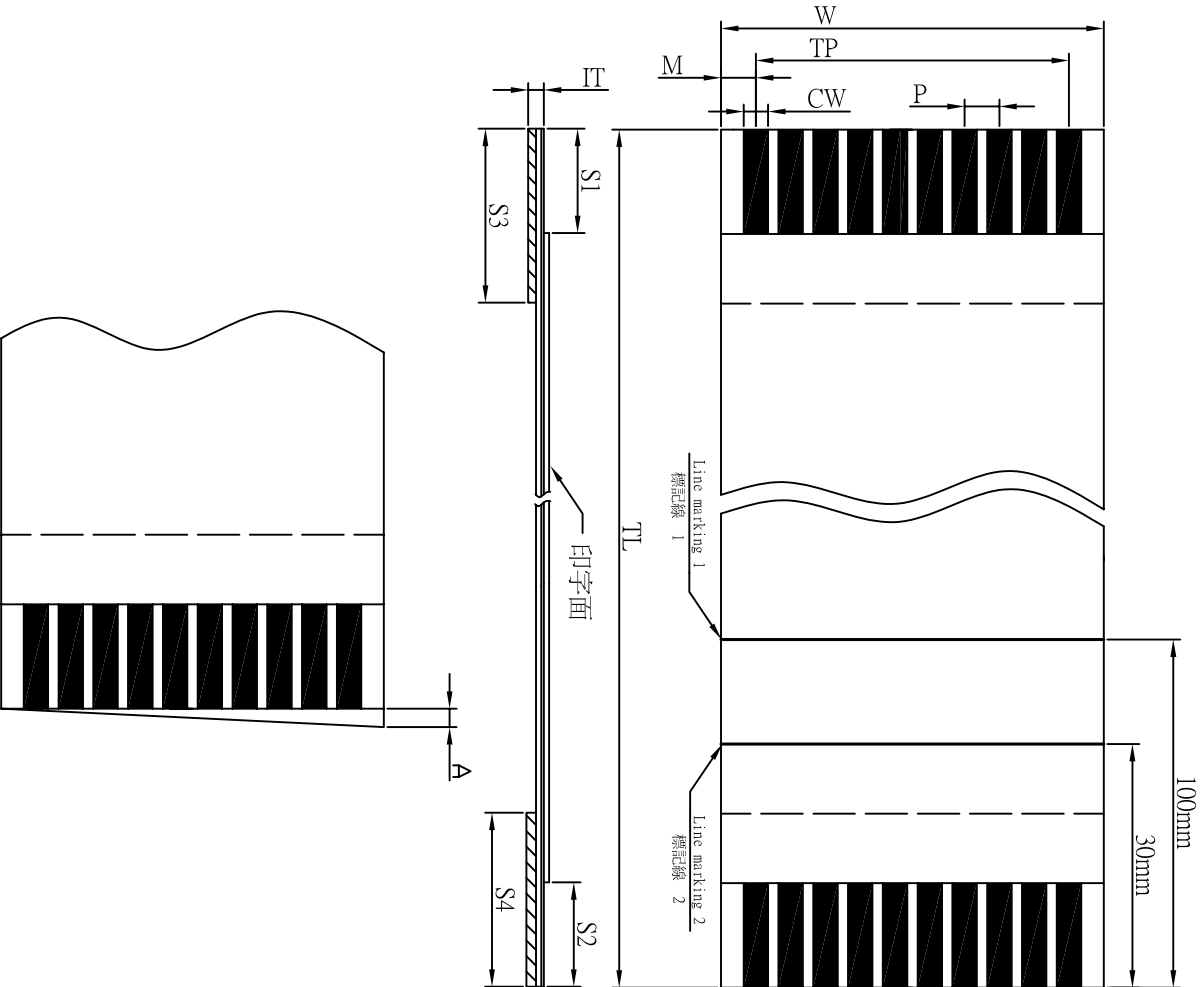




NO	ITEM	SPECIFITTON
---	Number of Conductor(導體數)	12
P	Pitch(間距)	1.0 $\pm$ 0.10
TP	Total Pitch(總間距)	11.0 $\pm$ 0.10
W	Width(總寬度)	13.0 $\pm$ 0.10
M	Margin(邊緣寬度)	1.0 $\pm$ 0.10
TL	Total Length(總長度)	360.0 $\pm$ 3.0
IT	Insertion Thickness(插入厚度)	0.30 $\pm$ 0.05
S1/S2	Conductor strip Length(導體裸露長度)	S1=4.0 $\pm$ 0.5 S2=4.0 $\pm$ 0.5
S3/S4	Supporting Tape Length(補強板長度)	S3=8.0/0+2.0 S4=8.0/0+2.0
Ct	Conductor Thickness(導體厚度)	0.05 $\pm$ 0.005
Cw	Conductor Width(導體寬度)	0.65 $\pm$ 0.03
A	Slanting(線口傾斜度)	A<0.5
---	Supporting Tape Color(補強板顏色)	Blue(藍色)
---	Supporting Tape Spec.(補強板規格)	LEB188-160-18
---	Insulation Spec.(絕緣膠規格)	100 μ m
---	Storage Temperature(保存溫度)	15°C~30°C
UL	UL style(UL 型號)	AWM20624

				MATERIAL:		DRAWING BY: 劉敏		 坤特電子(深圳)有限公司 QUEENTECH ELECTRONIC CO., LTD <table><tr><td>PART NO :</td><td>FFC4E120260440808.AT</td><td>MODEL:</td><td></td></tr><tr><td>CUST NO :</td><td></td><td>DMG NO:</td><td></td></tr><tr><td colspan="4">TITLE: FLEXIBLE FLAT CABLE Pitch=1.0mm L=360.0mm 12pin</td></tr><tr><td colspan="2">THIRD ANGLE PROJECTION</td><td colspan="2"></td></tr></table>				PART NO :	FFC4E120260440808.AT	MODEL:		CUST NO :		DMG NO:		TITLE: FLEXIBLE FLAT CABLE Pitch=1.0mm L=360.0mm 12pin				THIRD ANGLE PROJECTION			
PART NO :	FFC4E120260440808.AT	MODEL:																									
CUST NO :		DMG NO:																									
TITLE: FLEXIBLE FLAT CABLE Pitch=1.0mm L=360.0mm 12pin																											
THIRD ANGLE PROJECTION																											
				UNIT		CHECKED BY:																					
				mm																							
				.XXX	±0.03	APPROVED BY:																					
				.XX	±0.05	SCALE :																					
				.X	±0.10	1:1																					
A	RELEASE			±1°		REV: A																					
LTR	REVISION RECORD	DRG	CHK	DATE																							
				2009-09-15																							
				GENERAL TOLERANCES																							
				L INEAR		ANGLE																					